


Carton clamp, articulating arms

integral sideshift

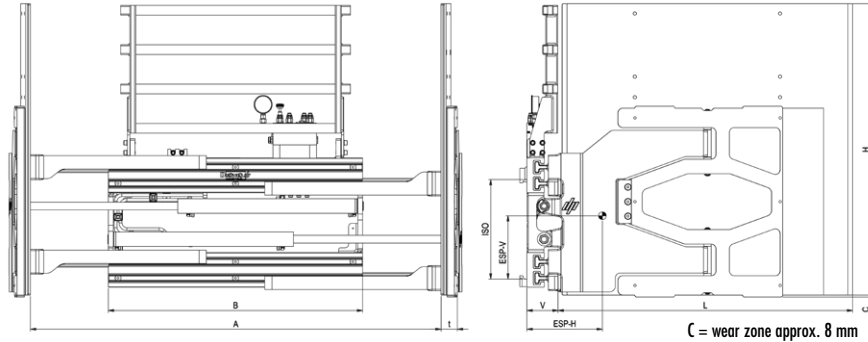

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A ITI mm	arm height H mm	arm length* L mm	arm thickness T mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
KKP 14	2,0-2,5/600	860	1350/600	II	980	430-1660	1200	780	50	124	426	332	492	336
		860						1020			349	339	561	404
		860						1220			426	346	621	464
		860						1320			465	351	650	495
KKP 16	2,5-3,0/600	860	1600/600	II*	980	430-1660	1200	1020	50	129	350	338	585	435
		860			980	430-1660		1220			424	344	650	500
		860			980	430-1660		1370			499	346	715	565
		890			1050	405-1695		1020			339	333	599	440
		890			1050	405-1695		1220			413	339	661	501
		890			1050	405-1695		1370			487	341	720	560
		990			1350	540-2245		1020			319	329	644	449
		990			1350	540-2245		1220			393	335	706	511
		990			1350	540-2245		1370			467	338	765	570
KKP 18	2,5-3,0/600	860	1800/600	II/III	980	450-1670	1200	1020	50	138	370	352	740	537
		860			980	450-1670		1220			420	358	784	608
		860			980	450-1670		1380			482	360	821	658
		890			1050	410-1670		1020			365	346	750	540
		890			1050	410-1670		1220			415	352	794	611
		890			1050	410-1670		1380			478	354	831	661
		990			1550	490-2320		1020			332	332	789	550
		990			1550	490-2320		1220			388	343	853	621
990	1550	490-2320	1380	445	350	896	671							

- 2 hydraulic functions required
- includes hoses and couplings
- pressure gauge as standard
- with pressure relief valve on the clampfunction as standard
- with protection strip as standard
- RiGu black as standard surface
- other surfaces see page 252
- clamp force options see page 249
- other arm dimensions upon request
- constant sideshift upon request
- ISO type B mounting upon request
- * arm length equals the usable length from the arm tip to the load contact on the clamp body, contact plate length - 20 mm

* ISO III upon request

