



Carton clamp, rigid arms

integral sideshift

KKS

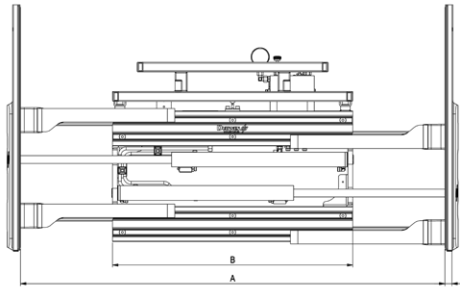

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A ITI mm	arm height H mm	arm length* L mm	arm thickness T mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
KKS 08	1,0-1,5/500	795	750/500	II	880	400-1430	1000	700	28	124	260	352	445	314
		795			880	400-1430		800			270	361	465	344
		860			880	400-1520		700			265	350	465	314
		860			980	400-1520		800			275	359	475	344
		860			980	500-1720		700			260	349	470	314
		860			980	500-1720		800			280	357	480	344
KKS 11	1,5-1,8/500	860	1050/500	II	980	340-1400	1000	700	28	129	275	336	470	317
		860			980	340-1400		800			285	347	480	347
		860			980	400-1520		700			270	335	475	317
		860			980	400-1520		800			280	345	485	347
		860			980	500-1720		700			270	334	480	317
		860			980	500-1720		800			280	340	490	347
		890			1050	400-1590		700			260	331	490	317
		890			1050	400-1590		800			270	341	500	347
		890			1050	400-1590		1000			320	343	505	349
		890			1050	500-1790		700			265	330	495	317
		890			1050	500-1790		800			275	336	505	347
		890			1050	500-1790		1000			315	342	510	349
		900			1150	400-1690		700			260	329	510	317
		900			1150	400-1690		800			270	339	520	347
		900			1150	400-1690		1000			315	342	515	349
		900			1150	500-1890		700			255	328	515	317
		900			1150	500-1890		800			265	334	525	347
		900			1150	500-1890		1000			310	341	520	349
KKS 14	2,0-2,5/600	890	1350/500	II	1050	400-1590	1000	1000	33	129	350	353	550	399
		890			1050	500-1790					350	351	555	405
		900			1150	400-1690					345	352	565	401
		900			1150	500-1890					345	349	570	406

- 2 hydraulic functions required
- includes hoses and couplings
- pressure gauge as standard with protection strip as standard

- RiGu black as standard surface
- other surfaces see page 252
- ISO type B mounting upon request
- clamp force options see page 249

* arm length equals the usable length from the arm tip to the load contact on the clamp body

