


Load backrest

LS-K

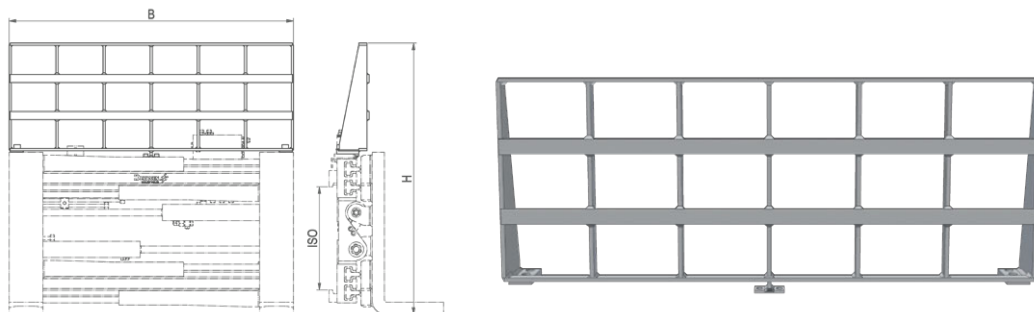

Load backrest for clamps and fork positioners based on clamp design for PGK-S (P. 33-34), PGK (P. 35-36), DGK (P. 46), DGK-S (P. 47), UFK (P. 50), USK (P. 52), KKP, KHG, KKS, KKS-S-T (P. 65-69), ZVP-S (P. 105-107), ZVP (P. 108-109), ZVP-AS (P. 110-111), ZVP-A (P. 112-113), ZVP for reach trucks (P. 114-115)

type	ISO	B mm	height* H mm
LS-K 25	II	720-1100 1110-1350	1000
LS-K 45	III	980-1150 1160-1350 1360-1550 1560-1750	1200
LS-K 80	IV	1350-1800 1810-2400	1500

● other widths upon request

* with ISO 2328 A

Load backrest for bale clamps for PBK (P. 56-57), PZK (P. 58-59), PBK-CR (P. 60)

type	ISO	width B mm	height* H mm
LS-K 25	II	720-1100 1110-1350	1000
LS-K 45	III	980-1150 1160-1350 1360-1550 1560-1750	1200
LS-K 80	IV	1350-1800 1810-2400	1400

● other widths upon request

● LS-K 25 for bale clamps max height 1200 mm, higher upon request only

*with ISO 2328 A