
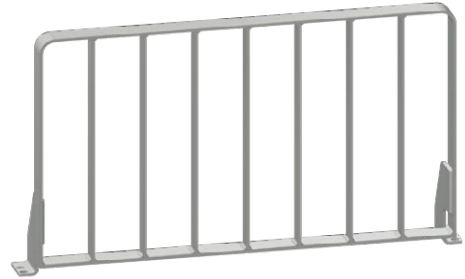


Load backrest

LS-RP

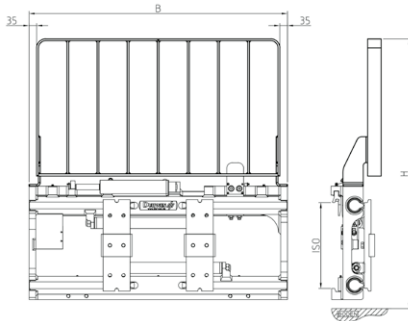

Load backrest for fork positioner for ZVW (P. 117-119), ZVW-S, (P. 120-122), ZVW-G (P. 123-125), ZVW-GS (P. 126-128), ZVW-I (P. 132-134), ZVW-IG (P. 135-137), RZV-S (P. 140-142), RZV (P. 143-145), RZV-GS (P. 146-148), RZV-G (P. 149-151), RZV, RZV-G for reach trucks (P. 152-153), RZV-I (P. 154-155), RZV-IG (P. 156-158), PZV-S, (P. 162-163), PZV (P. 164-165), PZV-GS (P. 166-167), PZV-G (P. 168-169), PZV-SI (P. 170-171), PZV-I (P. 172-173), PZV-GSI (P. 174-176), PZV-IG (P. 177-179), PZV-GC (P. 180)

type	ISO	width B mm	height* H mm
LS-RP 25	II	750-1100 1110-1350	1000**
LS-RP 45	III	1040-1150 1160-1350 1360-1550 1560-1750	1200**
LS-RP 80	IV	1350-1800 1810-2400	1500***

● other widths upon request

*with ISO 2328 A

** higher than 1400 mm upon request

*** higher than 1800 mm upon request

Bolt-on protection strip for all ZVW, RZV, PZV models

ISO	height h mm
II/III	125
IV	120

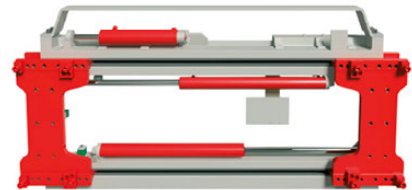



image shows PZV-S with protection strip

Option constant sideshift for revolving units for DPBK (P. 61), DDGK (P. 45), PWK (P. 48), DFK (P. 50), DGE (P. 237)

options	extra weight	extra thickness	remarks
solenoid valve (conventional)	—	—	indicate voltage
constant sideshift ISO II	35 kg	45 mm	+/- 100 mm, 3rd function
constant sideshift ISO III	50 kg	45 mm	+/- 100 mm, 3rd function
constant sideshift ISO IV	210 kg	73 mm	+/- 100 mm, 3rd function