
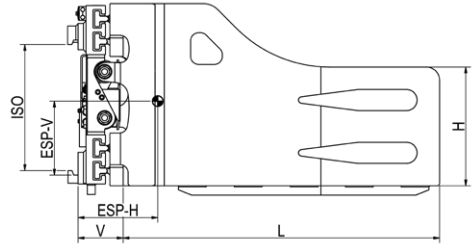


Container bale clamp

container version, integral sideshift

PBK-CR

The bale clamp PBK-CR features a cleared frame top and wear protections under frame and under arms. The hydraulic cylinders are covered by a cylinder protection as standard. It is ideal for loading and unloading containers. Frame and arms are wear protected.

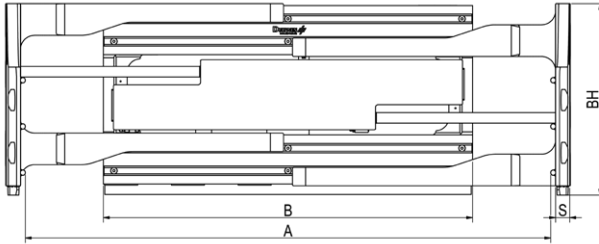

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A ITI mm	height H mm	length L mm	S (max)* mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
PBK 30-CR	3,0/500	860	2700/500	III	980	530-1710	400	1000	35 (66)	169	260	264	620	390
		860			520-1700	1200		35 (71)	330		259	660	410	
		890			570-1770	1000		35 (66)	255		266	630	399	
		890			560-1760	1200		35 (71)	325		260	670	419	
		990			570-1870	1000		35 (66)	250		268	650	405	
		990			560-1860	1200		35 (71)	320		261	690	425	
		1150			610-2260	1000		35 (66)	240		269	690	436	
		1150			600-2250	1200		35 (71)	310		262	730	456	
PBK 35-CR	3,0/600- 3,5/500	990	1150		570-1870	450	1000	40 (70)	171	240	288	865	565	
		990	560-1860		1200		40 (75)	310		283	900	585		
		1150	610-2260		1000		40 (70)	235		291	910	589		
		1150	600-2250		1200		40 (75)	305		285	945	609		
PBK 40-CR	3,5-4,0/600	1150	3200/600		1350	600-2250	450	1200	40 (75)	181	295	285	965	609
		1150			590-2240	1400		40 (85)	355		282	1015	639	
		1150			600-2350	1200		40 (75)	290		280	990	612	
		1150			590-2340	1400		40 (85)	350		278	1040	641	
PBK 45-CR	4,5/600- 5,0/500	1150	3600/600		1350	520-2120	450	1200	45 (80)	181	315	294	998	651
		1150			500-2100	1600		45 (95)	420		284	1145	771	
		1150			520-2320	1200		45 (80)	310		354	1020	685	
		1150			500-2300	1600		45 (95)	415		344	1170	805	
PBK 48-CR	5,0/600	1150	4200/600		1350	520-2120	450	1200	45 (85)	191	290	289	1040	671
		1150			500-2100	1600		45 (100)	410		279	1170	791	
		1150			520-2320	1200		45 (85)	285		349	1110	705	
		1150			500-2300	1600		45 (100)	405		339	1240	825	

- 2 hydraulic functions required
- includes hoses and couplings
- wear strips welded under arms and frame as standard
- cylinder protection as standard
- longer arms upon request

* approx. including rebar and pre-tension

