


Bale clamp

integral sideshift

The **bale clamp PBK** is made with double T steel profiles. This type of profile supports excellent visibility through the clamp and allows for a reduced lost load centre. The smooth and flush arms allow for dense stacking of bales. An integral sideshift is fitted as standard.

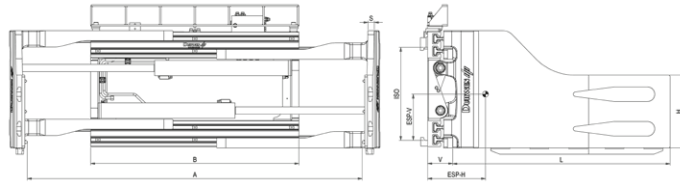

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A ITI mm	height H mm	length L mm	S (max)* mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
PBK 20	1,5-2,0/500	860	1650/500	II	980	530-1710	350	800	30 (92)	106	208	234	387	274
		860			980	520-1700		1000			243	226	417	304
		860			1050	570-1770		800			205	234	397	274
		860			1050	560-1760		1000			240	226	427	304
		860			1050	560-1760		1000			240	226	427	304
PBK 25	2,0-2,5/600	860	2300/500	II	980	520-1700	350	1000	30 (92)	139	236	226	485	322
		860			980	510-1690		1200			283	219	515	355
		860			1050	560-1760		1000			232	227	495	322
		860			1050	550-1750		1200			283	220	525	355
		860			1150	560-1860		1000			225	227	515	331
		860			1150	550-1850		1200			277	221	545	365
		860			1150	590-1940		1200			272	221	555	376
PBK 30	3,0/500	860	2700/500	III	980	530-1710	400	1000	30 (93)	139	249	276	565	375
		860			980	520-1700		1200	35 (98)		315	264	625	441
		890			1050	570-1770		1000	30 (93)		245	277	580	379
		890			1050	560-1760		1200	35 (98)		309	265	640	439
		990			1150	570-1870		1000	30 (93)		238	278	592	379
		990			1150	560-1860		1200	35 (98)		302	266	659	445
		1150			1350	610-2260		1000	30 (93)		224	279	641	389
		1150			1350	600-2250		1200	35 (98)		285	267	735	455
		1150			1350	600-2250		1200	35 (98)		285	267	735	455
PBK 35	3,0/600- 3,5/500	990	3000/500	III	1150	570-1870	450	1000	40 (110)	141	248	297	789	544
		990			1150	560-1860		1200			304	288	850	605
		1150			1350	610-2260		1000			225	299	852	568
		1150			1350	600-2250		1200			288	290	909	629
PBK 40	3,5-4,0/600	990	3200/600	III	1150	560-1860	450	1200	40 (110)	141	304	288	850	605
		990			1150	550-1850		1400		151	368	284	949	705
		1150			1350	600-2250		1200		141	288	290	909	630
		1150			1350	590-2240		1400		151	349	286	1012	732
PBK 45	4,5-5,0/500	1150	3600/600	III	1350	520-2120	450	1200	40 (128)	151	293	290	929	653
		1150			1350	500-2100		1600			397	281	1056	781
		1150			1550	600-2450		1200			278	291	991	684
		1150			1550	580-2430		1600			390	283	1128	812
		1350			1750	500-2500		1600			392	272	1150	815
PBK 48	5,0/600	1150	4200/600	III	1350	540-2120	450	1200	40 (101)	161	287	291	978	695
		1150			1350	520-2100		1600			402	282	1105	822
		1350			1550	620-2470		1200			273	292	1051	729
		1350			1550	600-2450		1600			381	284	1179	857

- 2 hydraulic functions required
- includes hoses and couplings
- wear strips welded under arms as standard
- with protection strip as standard
- load backrest type LS-K see page 247
- cylinder protection upon request (ISO II/III)
- wear strips under frame upon request (ISO II/III)
- constant sideshift upon request

PBK 20 up to 1300 mm long arms
 PBK 25 up to 1300 mm long arms
 PBK 30 up to 1700 mm long arms
 PBK 35 up to 1800 mm long arms
 PBK 40, 45, 48 up to 1700 mm long arms
 longer arms upon request

* including rebar and pre-tension