


Fork clamp

integral sideshift, bolt-on forks

The fork clamp **PGK** can spread the forks beyond the attachment frame width. It can carry loads on the forks as well as clamped between the forks. The strong steel profiles allow for excellent visibility and minimised lost load centre. An integral sideshift is included as well as bolt-on forks.

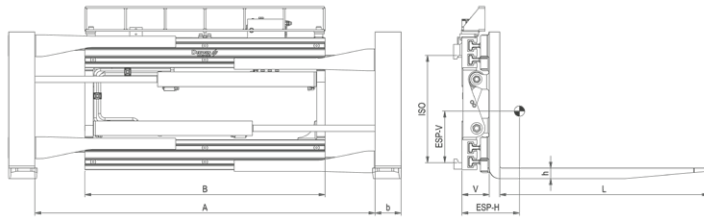

type	lift truck to LC mm	min. carriage mm	capacity		ISO	B mm	opening range A ITI mm	forks b x h x L mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
			kg LC mm	kg LC mm									
PGK 15*	1,0-1,5/500	860 890	1500/500	1200/500	II	980 1050	360-1510 360-1580	100x35x1200	101	183 180	190 191	300 305	181 186
PGK 20	1,6-2,0/500	860 890 990	2000/500	1500/500	II	980 1050 1150	360-1510 360-1580 360-1680	100x40x1200	106	195 190 188	188 189 191	320 330 340	196 197 201
PGK 25	2,0-2,5/600	860 890 890 990 990 990	2500/600	1900/500	II	980 1050 1080 1150 1150 1200 1400	310-1460 310-1530 310-1560 310-1630 70-1150 310-1680 310-1880	125x45x1200	131	231 219 217 214 225 212 202	182 184 185 186 180 186 190	415 420 425 440 435 445 465	235 257 257 257 224 257 259
PGK 30	3,0/500	860 890 990 990 1040 1040 1150 1150	3000/500	2400/500	III	980 1050 1150 1150 1200 1300 1350 1450	310-1460 310-1530 310-1630 210-1430 310-1680 310-1780 310-1830 310-1930	125x50x1200	131	229 223 219 219 216 211 210 204	222 225 227 228 229 229 230 233	440 450 465 460 470 475 480 513	278 282 283 280 283 284 284 284
PGK 35	3,0/600- 3,5/500	990 1070 1150	3500/500	2700/500	III	1150 1250 1350	260-1580 260-1680 260-1780	150x50x1200	136	234 229 225	219 221 223	520 535 550	339 340 341
PGK 40	3,5-4,0/600	990 1090 1150 1150	4100/500	2900/500	III	1150 1250 1350 1450	250-1560 250-1660 250-1760 250-1860	150x50x1200	138	212 209 201 197	247 248 252 256	610 630 650 670	377 378 393 395
PGK 45	4,5-5,0/500	1090 1150 1150 1350	4500/600	3500/500	III	1250 1350 1450 1550	250-1660 250-1760 250-1860 250-1960	150x60x1200	148	226 221 217 212	245 246 248 249	700 720 740 760	452 460 462 462
PGK 48	5,0/600	1150 1150 1350	5000/600	3500/600	III	1250 1450 1550	250-1700 250-1800 250-1900	150x70x1200	158	223 224 225	244 246 247	810 830 840	544 546 547

- 2 hydraulic functions required
- includes hoses and couplings
- features bolt-on forks as standard
- toe-in on forks as standard
- with pressure relief valve on the clamp function as standard
- with protection strip as standard

- load backrest type LS-K see page 247
- cylinder protection upon request
- slip-on arms see page 244-245
- foundry/fishing version see page 240-241

*Forks longer 1600 mm cross section changes

type	forks b x h mm
PGK 15	100x40