Fork clamp

PGK ISO IV

integral sideshift, bolt-on forks

The fork clamp PGK can spread the forks beyond the attachment frame width. It can carry loads on the forks as well as clamped between the forks. The strong steel profiles allow for excellent visibility and minimised lost load centre.
An integral sideshift is included as well as bolt-on forks.

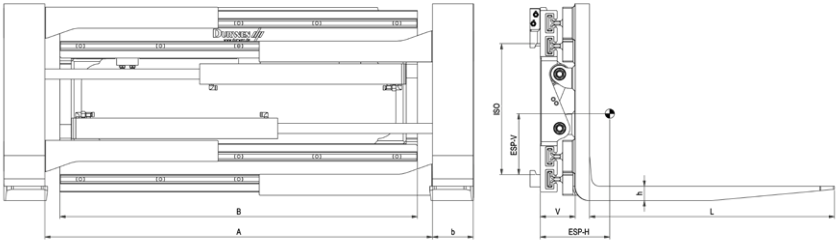

type	lift truck to LC mm	min. carriage mm	capacity on forks kg LC mm	capacity as clamp kg LC mm	ISO	B mm	opening range A ITI mm	forks b x h x L mm	V LLC mm	COG/ ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
PGK 50	5,0/600	1225 1320 1420 1640	5000/600	3500/600	IV	1350 1450 1550 1800	250-1700 250-1800 250-1900 250-2150	150x70x1200	158	220 213 209 201	282 288 290 294	890 920 940 995	567 569 576 580
PGK 60	6,0/600	1255 1320 1420 1640 1640	6000/600	3800/600	IV	1300 1450 1550 1800 2000	250-1650 250-1800 250-1900 250-2150 250-2350	150x70x1200	158	221 213 209 201 196	281 288 290 294 295	890 930 950 1001 1060	566 569 574 576 577
PGK 80	7,0-8,0/600	1600 1600 1600 1600	8000/600	4800/600	IV	1850 2000 2200 2400	160-2000 160-2150 160-2350 160-2550	200x70x1200	169	205 202 197 193	292 294 296 298	1250 1285 1325 1365	764 766 769 772
PGK 100	8,0/900	1600 1600 1600 1600	8000/900	7500/600	IV	2000 2100 2200 2400	160-2150 160-2250 160-2350 160-2550	200x80x1200	185	220 210 205 200	296 288 286 282	1560 1590 1620 1670	960 962 964 969
PGK 110	8,0/1100	1750	8000/1100	8000/600	IV	2200	160-2060	200x100x1200	210	225	280	2420	1080
PGK 120-I*	12,0/1200	-	12000/1200	6500/1200	integriert	2200 2400	200-2000 200-2200	250/220x120x1200	330	220 230	750** 752**	3800 3950	2110 2150
PGK 140-I*	14,0/1200	-	14000/1200	7000/1200	integriert	2200 2400	200-2000 200-2200	250/230x120x1200	330	235 240	748** 746**	3860 4010	2130 2170
PGK 160-I*	16,0/1200	-	16000/1200	7500/1200	integriert	2200 2400	200-2000 200-2200	250x120x1200	330	260 250	740** 738**	3940 4090	2170 2210

- 2 hydraulic functions required
- includes hoses and couplings
- features bolt-on forks as standard
- toe-in on forks as standard
- with pressure relief valve on the clamp function as standard
- load backrest type LS-K see page 247
- cylinder protection upon request
- slip-on arms see page 244-245
- foundry/fishing version see page 240-241

* weight without brackets / COG is without brackets, from front edge of brackets / LLC is from front edge of brackets

** from floor

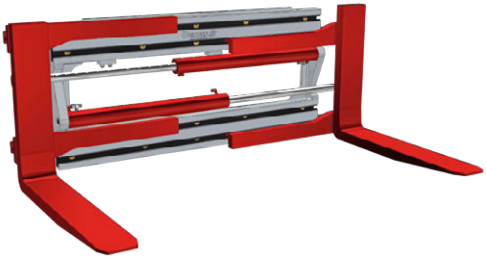

DURWEN Forklift Attachments