




Paper roll clamp 360°

**PRK 100
ISO IV**

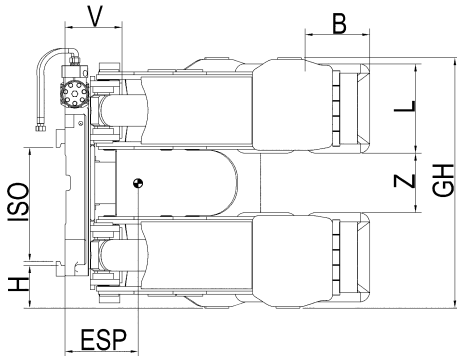

long arm unsplit



long arm split

type	capacity kg LC mm	min. carriage mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
long arm unsplit													
PRK 100 B - 13	5600/650	1150	IV	400 - 1300	powered	1240	280x500	200	250	255	246	387	1360
PRK 100 B - 14	5500/725			450 - 1450							263		1440
PRK 100 B - 15	5400/760			480 - 1520							280		1470
PRK 100 B - 16	5300/800			550 - 1600							297		1510
PRK 100 B - 18	4600/915			580 - 1830							311		1630
PRK 100 B - 19	4300/950			600 - 1900							328		1670
PRK 100 B - 20	4000/1000			600 - 2000							345		1710
PRK 100 B - 21	3800/1050			650 - 2100							362		1750
long arm split													
PRK 100 TB - 13	5600/650	1150	IV	400 - 1300	powered	1240	280x500	200	250	255	241	387	1350
PRK 100 TB - 14	5500/725			450 - 1450							258		1430
PRK 100 TB - 15	5400/760			480 - 1520							275		1460
PRK 100 TB - 16	5300/800			550 - 1600							292		1500
PRK 100 TB - 18	4600/915			580 - 1830							306		1620
PRK 100 TB - 19	4300/950			600 - 1900							323		1660
PRK 100 TB - 20	4000/1000			600 - 2000							340		1700
PRK 100 TB - 21	3800/1050			650 - 2100							350		1740

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 72
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, choose on order (no add-on price)
- 0° arm design upon request
- one piece contact plate per arm upon request

- load extender upon request
- quick release hooks ISO IV upon request,
- force options see page 24