
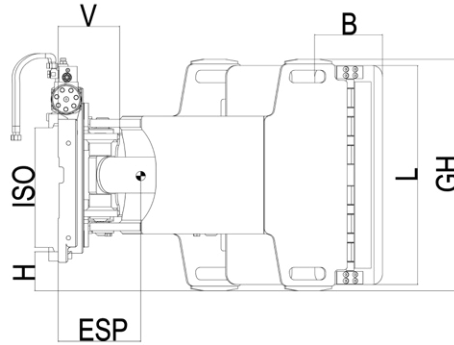


Paper roll clamp 360°

One-arm clamp

The paper roll clamp **type PRK 15** is able to pick up paper rolls in vertical and horizontal position. This type features a long and a short arm and is used for the transport of single rolls. The short arm can either be fixed or powered.

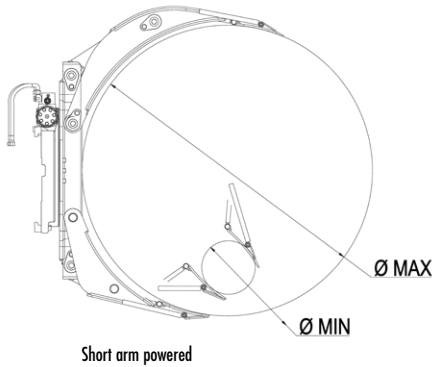

type	capacity kg LC mm	min. carriage mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	H mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
PRK 15 S - 10	1500/535	850	II	380-1070	fixed	740	220x700	110	167	220	256	390
PRK 15 S - 11	1400/575			400-1150	fixed					225		408
PRK 15 S - 13	1300/650			400-1300	fixed					240		430
PRK 15 B - 13	1300/650			250-1300	powered					250		480
PRK 15 S - 14	1200/700			500-1400	fixed					245		460
PRK 15 B - 14	1200/700			250-1400	powered					255		515
PRK 15 S - 15	1100/760			500-1520	fixed					262		480
PRK 15 B - 15	1100/760			250-1520	powered					272		535
PRK 15 S - 16	1000/800			500-1600	fixed					280		500
PRK 15 B - 16	1000/800			250-1600	powered					290		555

- 2 hydraulic functions required
- includes hoses and couplings
- standard with one-piece contact plates
- standard with safety valve
- contact plate surface machine steel grip
- optional surfaces see page 72
- picking up of horizontal rolls requires 5° forward mast tilt
- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, choose on order (no add-on price)
- 0° arm design upon request
- other contact plates upon request
- turning range limit upon request
- load extender upon request

