
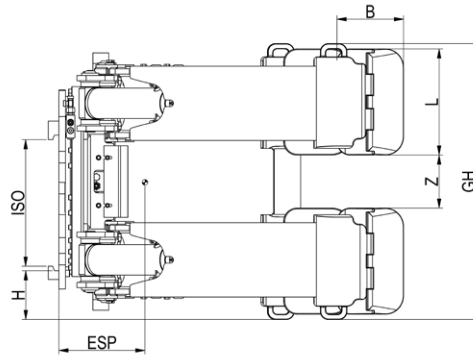


Paper roll clamp 180°

PRK 40-180
ISO III

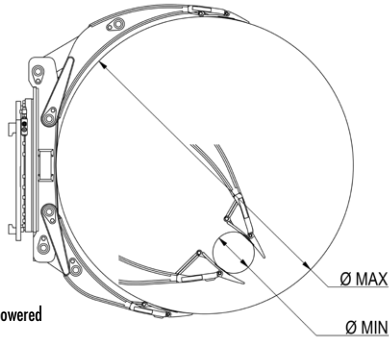

type	capacity kg LC mm	min. carriage mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	COG/ ESP hor. mm	COG/ ESP vert. mm	weight kg
PRK 40 - Long arm unsplit													
PRK 40 B-13-180	3000/650	950	III	250 - 1300	powered	1040	250x400	200	184	215	241	333	795
PRK 40 S-13-180	3000/650			500 - 1300	fixed						241		790
PRK 40 B-15-180	2650/760			250 - 1520	powered						265		850
PRK 40 S-15-180	2650/760			500 - 1520	fixed						265		845
PRK 40 B-16-180	2500/800			250 - 1600	powered						292		878
PRK 40 S-16-180	2500/800			600 - 1600	fixed						292		873
PRK 40 B-18-180	2100/915			350 - 1830	powered						301		925
PRK 40 S-18-180	2100/915			630 - 1830	fixed						301		920
PRK 40 - Long arm split													
PRK 40 TB-13-180	3000/650	950	III	250 - 1300	powered	1040	250x400	200	184	215	234	333	785
PRK 40 TS-13-180	3000/650			500 - 1300	fixed						234		780
PRK 40 TB-15-180	2650/760			250 - 1520	powered						260		840
PRK 40 TS-15-180	2650/760			500 - 1520	fixed						260		835
PRK 40 TB-16-180	2500/800			250 - 1600	powered						287		868
PRK 40 TS-16-180	2500/800			600 - 1600	fixed						287		863
PRK 40 TB-18-180	2100/915			350 - 1830	powered						296		915
PRK 40 TS-18-180	2100/915			630 - 1830	fixed						296		910

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 72
- other surfaces upon request
- with centre cover as standard
- 160 bar pressure at entry required,
- less pressure results in less clamping force
- powered short arm sequential movement as standard

- 0° arm design upon request
- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks ISO III upon request
- force options see page 249

