




Paper roll clamp 360°

PRK 45
ISO III/IV

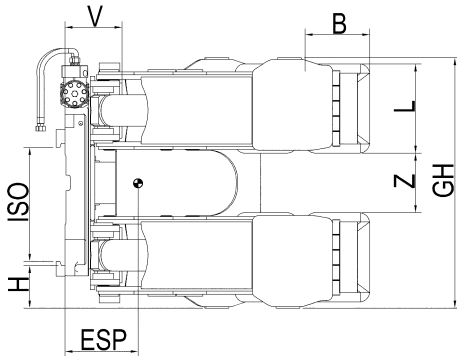

long arm unsplit



long arm split

type	capacity kg LC mm	min. carriage mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
PRK 45 - Long arm unsplit													
PRK 45 B - 13	3500/650	1150	III/IV	250 - 1300	powered	1040	250x400	200	195/200	220	215	333	845
PRK 45 S - 13	3500/650			550 - 1300	fixed						215		840
PRK 45 B - 14	3300/725			250 - 1450	powered						230		875
PRK 45 S - 14	3300/725			550 - 1450	fixed						230		870
PRK 45 B - 15	3000/760			250 - 1520	powered						240		900
PRK 45 S - 15	3000/760			650 - 1520	fixed						240		895
PRK 45 B - 16	2800/800			250 - 1600	powered						280		950
PRK 45 S - 16	2800/800			650 - 1600	fixed						280		945
PRK 45 B - 18	2500/915			400 - 1830	powered						300		970
PRK 45 S - 18	2500/915			650 - 1830	fixed						300		965
PRK 45 - Long arm split													
PRK 45 TB - 13	3500/650	1150	III/IV	250 - 1300	powered	1040	250x400	200	195/200	220	210	333	835
PRK 45 TS - 13	3500/650			550 - 1300	fixed						210		830
PRK 45 TB - 14	3300/725			250 - 1450	powered						225		865
PRK 45 TS - 14	3300/725			550 - 1450	fixed						225		860
PRK 45 TB - 15	3000/760			250 - 1520	powered						236		890
PRK 45 TS - 15	3000/760			650 - 1520	fixed						236		885
PRK 45 TB - 16	2800/800			250 - 1600	powered						270		940
PRK 45 TS - 16	2800/800			650 - 1600	fixed						270		935
PRK 45 TB - 18	2500/915			400 - 1830	powered						295		960
PRK 45 TS - 18	2500/915			650 - 1830	fixed						295		955

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 72
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, choose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks ISO III/ISO IV upon request
- force options see page 249




image shows unit complete with
optional centre cover