
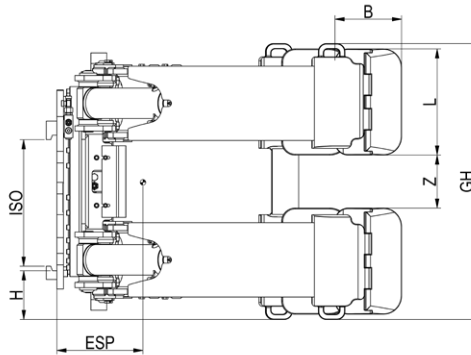


Paper roll clamp 180°

PRK 45-180
ISO III

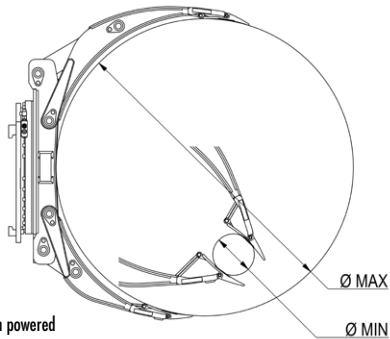

type	capacity kg LC mm	min. carriage mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	COG/ ESP hor. mm	COG/ ESP vert. mm	weight kg
PRK 45 - Long arm unsplit													
PRK 45 B-13-180	3500/650	950	III	250 - 1300	powered	1040	250x400	200	184	215	262	333	830
PRK 45 S-13-180	3500/650			550 - 1300	fixed						262		825
PRK 45 B-15-180	3000/760			250 - 1520	powered						288		875
PRK 45 S-15-180	3000/760			650 - 1520	fixed						288		870
PRK 45 B-16-180	2800/800			250 - 1600	powered						315		895
PRK 45 S-16-180	2800/800			650 - 1600	fixed						315		890
PRK 45 B-18-180	2500/915			400 - 1830	powered						325		965
PRK 45 S-18-180	2500/915			650 - 1830	fixed						325		960
PRK 45 - Long arm split													
PRK 45 TB-13-180	3500/650	950	III	250 - 1300	powered	1040	250x400	200	184	215	257	333	820
PRK 45 TS-13-180	3500/650			550 - 1300	fixed						257		815
PRK 45 TB-15-180	3000/760			250 - 1520	powered						283		865
PRK 45 TS-15-180	3000/760			650 - 1520	fixed						283		860
PRK 45 TB-16-180	2800/800			250 - 1600	powered						310		885
PRK 45 TS-16-180	2800/800			650 - 1600	fixed						310		880
PRK 45 TB-18-180	2500/915			400 - 1830	powered						320		955
PRK 45 TS-18-180	2500/915			650 - 1830	fixed						320		950

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 72
- other surfaces upon request
- with centre cover as standard
- 160 bar pressure at entry required,
- less pressure results in less clamping force
- powered short arm sequential movement as standard

- 0° arm design upon request
- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks ISO III upon request
- force options see page 249

