




Paper roll clamp 360°

PRK 50
ISO III/IV

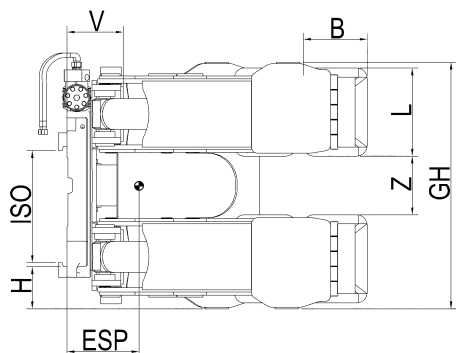

long arm unsplit



long arm split

type	capacity kg LC mm	min. carriage mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
PRK 50 - Long arm unsplit													
PRK 50 B - 13	4000/650	1150	III/IV	250 - 1300	powered	1140	280x400	300	245/250	225	247	329	1020
PRK 50 S - 13	4000/650			500 - 1300	fixed						247		1005
PRK 50 B - 14	3900/725			250 - 1450	powered						259		1045
PRK 50 S - 14	3900/725			500 -1450	fixed						259		1030
PRK 50 B - 15	3800/760			250 - 1520	powered						278		1070
PRK 50 S - 15	3800/760			500 - 1520	fixed						278		1055
PRK 50 B - 16	3700/800			250 - 1600	powered						283		1100
PRK 50 S - 16	3700/800			500 - 1600	fixed						283		1085
PRK 50 B - 18	3150/915			350 - 1830	powered						307		1170
PRK 50 S - 18	3150/915			630 - 1830	fixed						307		1155
PRK 50 - Long arm split													
PRK 50 TB - 13	4000/650	1150	III/IV	250 - 1300	powered	1140	280x400	300	245/250	225	242	329	1015
PRK 50 TS - 13	4000/650			500 - 1300	fixed						242		1000
PRK 50 TB - 14	3900/725			250 - 1450	powered						254		1040
PRK 50 TS - 14	3900/725			500 -1450	fixed						254		1025
PRK 50 TB - 15	3800/760			250 - 1520	powered						275		1065
PRK 50 TS - 15	3800/760			500 - 1520	fixed						275		1050
PRK 50 TB - 16	3700/800			250 - 1600	powered						278		1095
PRK 50 TS - 16	3700/800			500 - 1600	fixed						278		1080
PRK 50 TB - 18	3150/915			350 - 1830	powered						302		1165
PRK 50 TS - 18	3150/915			630 - 1830	fixed						302		1150

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 72
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, choose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks ISO III/ISO IV upon request
- force options see page 249




image shows unit complete with
optional centre cover