
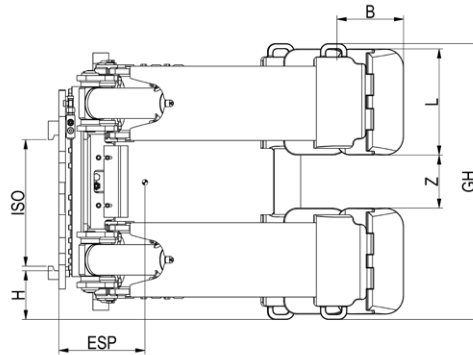


Paper roll clamp 180°

PRK 50-180
ISO III/IV

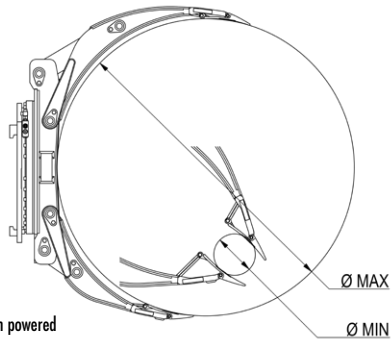

type	capacity kg LC mm	min. carriage mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
PRK 50 - Long arm unsplit													
PRK 50 B-13-180	4000/650	1000	III/IV	250 - 1300	powered	1140	280x400	300	157/202	220	259	405	980
PRK 50 S-13-180	4000/650			500 - 1300	fixed						259		975
PRK 50 B-15-180	3800/760			250 - 1520	powered						287		1050
PRK 50 S-15-180	3800/760			500 - 1520	fixed						287		1045
PRK 50 B-16-180	3700/800			250 - 1600	powered						295		1060
PRK 50 S-16-180	3700/800			500 - 1600	fixed						295		1055
PRK 50 B-18-180	3150/915			350 - 1830	powered						317		1120
PRK 50 S-18-180	3150/915			630 - 1830	fixed						317		1115
PRK 50 - Long arm split													
PRK 50 TB-13-180	4000/650	1000	III/IV	250 - 1300	powered	1140	280x400	300	157/202	220	254	405	970
PRK 50 TS-13-180	4000/650			500 - 1300	fixed						254		965
PRK 50 TB-15-180	3800/760			250 - 1520	powered						282		1040
PRK 50 TS-15-180	3800/760			500 - 1520	fixed						282		1035
PRK 50 TB-16-180	3700/800			250 - 1600	powered						290		1050
PRK 50 TS-16-180	3700/800			500 - 1600	fixed						290		1045
PRK 50 TB-18-180	3150/915			350 - 1830	powered						312		1110
PRK 50 TS-18-180	3150/915			630 - 1830	fixed						312		1105

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 72
- other surfaces upon request
- with centre cover as standard
- 160 bar pressure at entry required,
- less pressure results in less clamping force
- powered short arm sequential movement as standard
- 0° arm design upon request
- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks ISO III/IV upon request
- force options see page 249

