
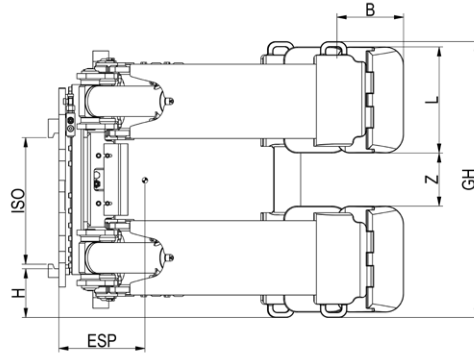


Paper roll clamp 180°

PRK 60-180
ISO IV

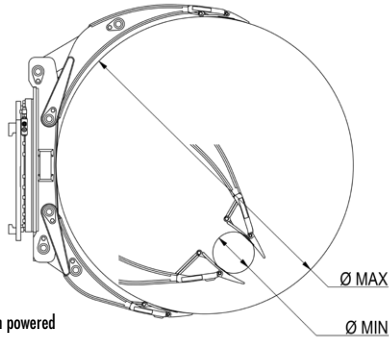

type	capacity kg LC mm	min. carriage mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	COG/ ESP hor. mm	COG/ ESP vert. mm	weight kg
PRK 60 - long arm unsplit													
PRK 60 B-13-180	4500/650	1000	IV	250 - 1300	powered	1240	280x500	200	207	238	294	406	1165
PRK 60 S-13-180	4500/650			500 - 1300	fixed						294		1160
PRK 60 B-15-180	4200/760			250 - 1520	powered						313		1225
PRK 60 S-15-180	4200/760			450 - 1520	fixed						313		1220
PRK 60 B-16-180	4000/800			250 - 1600	powered						318		1240
PRK 60 S-16-180	4000/800			500 - 1600	fixed						318		1235
PRK 60 B-18-180	3500/915			350 - 1830	powered						333		1275
PRK 60 S-18-180	3500/915			650 - 1830	fixed						333		1270
PRK 60 - long arm split													
PRK 60 TB-13-180	4500/650	1000	IV	250 - 1300	powered	1240	280x500	200	207	238	289	406	1155
PRK 60 TS-13-180	4500/650			500 - 1300	fixed						289		1150
PRK 60 TB-15-180	4200/760			250 - 1520	powered						308		1215
PRK 60 TS-15-180	4200/760			450 - 1520	fixed						308		1210
PRK 60 TB-16-180	4000/800			250 - 1600	powered						313		1230
PRK 60 TS-16-180	4000/800			500 - 1600	fixed						313		1225
PRK 60 TB-18-180	3500/915			350 - 1830	powered						328		1265
PRK 60 TS-18-180	3500/915			650 - 1830	fixed						328		1260

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 72
- other surfaces upon request
- with centre cover as standard

- 160 bar pressure at entry required,
- less pressure results in less clamping force
- powered short arm sequential movement as standard
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks ISO IV upon request
- force options see page 249

