




Paper roll clamp 360°

PRK 80
ISO IV

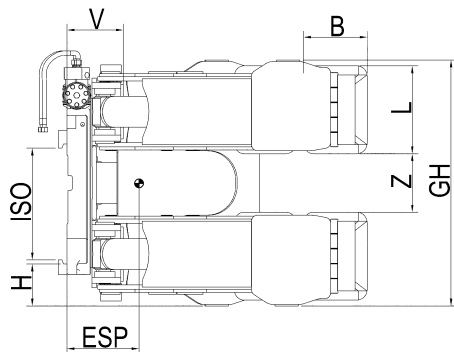

long arm unsplit



long arm split

type	capacity kg LC mm	min. carriage mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
long arm unsplit													
PRK 80 B - 13	5000/650	1150	IV	250 - 1300	powered	1240	280x500	200	255	239	259	383	1330
PRK 80 S - 13	5000/650			500 - 1300	fixed						259		1325
PRK 80 B - 14	4800/725			250 - 1450	powered						271		1365
PRK 80 S - 14	4800/725			500 - 1450	fixed						271		1360
PRK 80 B - 15	4600/760			250 - 1520	powered						282		1395
PRK 80 S - 15	4600/760			450 - 1520	fixed						282		1390
PRK 80 B - 16	4500/800			250 - 1600	powered						291		1430
PRK 80 S - 16	4500/800			500 - 1600	fixed						291		1425
PRK 80 B - 18	4000/915			350 - 1830	powered						326		1490
PRK 80 S - 18	4000/915			650 - 1830	fixed						326		1485
PRK 80 B - 19	3800/950			350 - 1900	powered						343		1520
PRK 80 S - 19	3800/950			700 - 1900	fixed						343		1515
PRK 80 B - 20	3600/1000			350 - 2000	powered						360		1549
PRK 80 S - 20	3600/1000			700 - 2000	fixed						360		1544
PRK 80 B - 21	3400/1050			450 - 2100	powered						377		1580
PRK 80 S - 21	3400/1050			900 - 2100	fixed						377		1575
long arm split													
PRK 80 TB - 13	5000/650	1150	IV	250 - 1300	powered	1240	280x500	200	255	239	254	383	1335
PRK 80 TS - 13	5000/650			500 - 1300	fixed						254		1330
PRK 80 TB - 14	4800/725			250 - 1450	powered						266		1370
PRK 80 TS - 14	4800/725			500 - 1450	fixed						266		1365
PRK 80 TB - 15	4600/760			250 - 1520	powered						277		1400
PRK 80 TS - 15	4600/760			450 - 1520	fixed						277		1395
PRK 80 TB - 16	4500/800			250 - 1600	powered						286		1425
PRK 80 TS - 16	4500/800			500 - 1600	fixed						286		1420
PRK 80 TB - 18	4000/915			350 - 1830	powered						321		1485
PRK 80 TS - 18	4000/915			650 - 1830	fixed						321		1480
PRK 80 TB - 19	3800/950			350 - 1900	powered						338		1515
PRK 80 TS - 19	3800/950			700 - 1900	fixed						338		1510
PRK 80 TB - 20	3600/1000			350 - 2000	powered						355		1544
PRK 80 TS - 20	3600/1000			700 - 2000	fixed						355		1539
PRK 80 TB - 21	3400/1050			450 - 2100	powered						372		1575
PRK 80 TS - 21	3400/1050			900 - 2100	fixed						372		1570

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 72
- other surfaces upon request
- 0° arm design upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45° choose on order (no add-on price)
- one piece contact plate per arm upon request
- load extender upon request

- quick release hooks ISO IV upon request
- force options see page 249