


Pallet exchanger

PWK

360° total rotation

The **pallet exchanger PWK** is used for clamping loads and rotating them through 180°, allowing the load to be placed on an alternative pallet. Total rotation is 360°. The rotator uses a worm gear system protected against the ingress of dirt and will give a long service life.

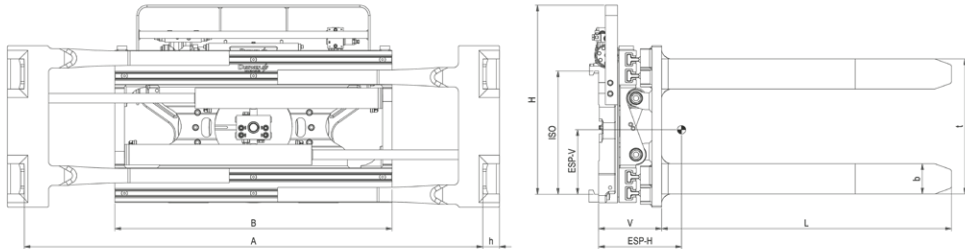

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A ITI mm	t mm	forks b x h x L mm	H mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
PWK 15	1,0-2,0/500	840	1500/500	II	980	460-1640	560	100x50x1200	694	223	273	250	595	499
PWK 25	2,0-2,5/600	950	2000/500	II	980 1150	540-1650 560-1900		125x50x1200	784	261	292 290	293 281	800 845	580 628
PWK 30	3,0/500	950	2500/500	III	1150 1350	560-1900 560-2100		125x50x1200	784	261	239 244	291 241	850 870	628 630
PWK 35	3,0/600-3,5/500	950	3000/500	III	1350 1450	560-2100 560-2200		150x50x1200	784	261	235 233	239 243	930 945	701 713
PWK 45	3,5/600-5,0/500	1130	3500/500	III	1350 1550	560-2100 560-2300		150x60x1200	904	291	302 297	324 320	1230 1260	880 910

- 2 hydraulic functions required (3 hydraulic functions with constant sideshift)
- includes hoses and couplings
- welded forks as standard

- standard with protection strip type SB-DG (does not rotate, height = H, for exact type see page 246)
- pressure gauge with hand wheel upon request

- constant sideshift see page 248
- side arm upon request

