
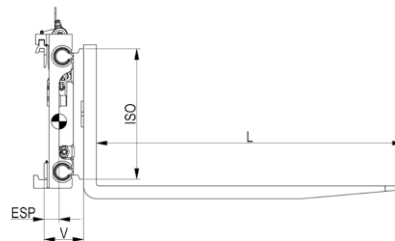


Sideshifting fork positioner

constant sideshift, bolt-on forks

RZV-GS
ISO II

The **sideshifting fork positioner RZV-GS** uses stable round bar guides for fork positioning. The simple design offers reliability and excellent operator visibility. The constant sideshift operates at any fork position.


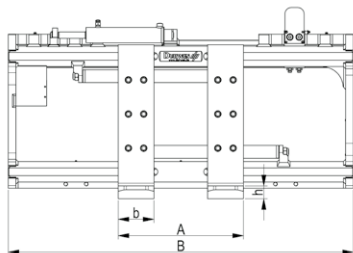


type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	A mm	forks b x h x L mm	sideshift mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
RZV 16-GS*	1,0-1,6/500	710 840 900	1600/500	II	850 980 1040	470-910 470-1040 470-1100	100x40x1200	+/- 75 +/- 100 +/- 100	142	229 228 224	140 144 146	241 246 254
RZV 20-GS*	1,8-2,0/500	710 840 900 990 1040	2000/500		850 980 1040 1100 1150	470-910 470-1040 470-1100 470-1160 470-1210	100x45x1200	+/- 75 +/- 100 +/- 100 +/- 100 +/- 100		225 222 221 221 218	136 140 143 144 144	246 250 258 262 268
RZV 25-GS*	2,0/600-2,5/500	840 840 900 990 1040 960 1110	2500/500		980 1000 1040 1100 1150 1200 1350	490-1060 490-1080 490-1120 490-1180 490-1230 490-1280 490-1430	120x40x1200	+/- 100		220 218 218 218 215 215 213	136 138 139 139 140 141 143	255 261 263 267 272 275 282
RZV 28-GS*	2,5/600	900 1040 1110	2500/600		1040 1150 1350	495-1125 495-1235 495-1435	125x45x1200	+/- 100		220 218 215	131 133 136	273 278 288

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- features bolt-on forks as standard
- for hook-on forks ISO 2328
- quick release hooks upon request (ISO II)
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed
- load backrest/protection strip type LS-RP see page 248

***Forks longer 1600 mm cross section changes**

type	forks b x h mm
RZV 16-GS	100x50
RZV 20-GS	100x50
RZV 25-GS	120x50
RZV 28-GS	125x50

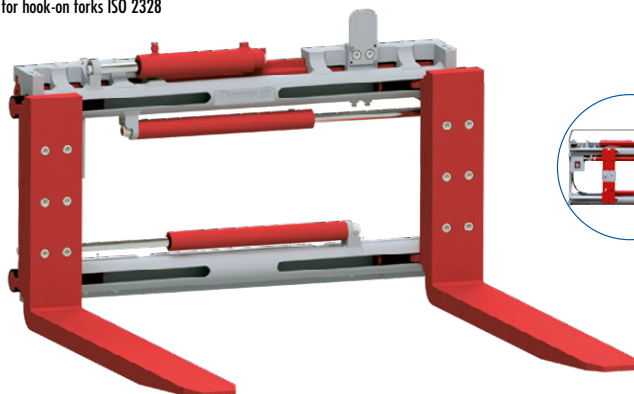

option: protection strip