
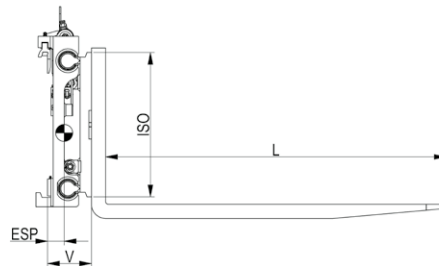


Sideshifting fork positioner

constant sideshift, bolt-on forks

RZV-GS
ISO III

The **sideshifting fork positioner RZV-GS** uses stable round bar guides for fork positioning. The simple design offers reliability and excellent operator visibility. The constant sideshift operates at any fork position.

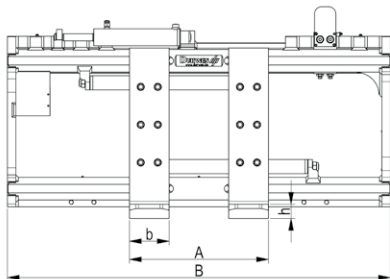



type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	A mm	forks b x h x L mm	sideshift mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
RZV 30-GS*	3,0/500	700 790 1040 1040 1110	3000/500	III	1040 1100 1150 1200 1350	495-1125 495-1185 495-1235 495-1285 495-1435	125x45x1200	+/- 100	152	210 207 205 204 203	176 177 178 178 179	313 320 326 329 340
RZV 35-GS	3,0/600- 3,5/500	790 1040 1040 1110	3500/500		1100 1150 1200 1350	490-1180 490-1230 490-1280 490-1430	140x50x1200			224 222 221 218	166 167 168 169	362 368 372 383
RZV 40-GS	3,5/600- 4,0/500	1020 1160 1150 1340	4000/500		1150 1350 1550 1750	490-1230 490-1430 490-1630 490-1830	140x50x1200		168	228 225 220 215	179 184 186 188	415 430 445 460
RZV 45-GS	4,0-5/600	1020 1040 1120 1050 1160 1180 1150 1340	5000/600		1150 1200 1250 1300 1350 1450 1550 1750	500-1240 500-1290 500-1340 500-1390 500-1440 500-1540 500-1640 500-1840	150x60x1200			228 227 226 226 225 222 220 215	165 165 166 169 169 171 171 175	465 468 472 476 480 488 495 510

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- features bolt-on forks as standard
- for hook-on forks ISO 2328

- load backrest/protection strip type LS-RP see page 248
- quick release hooks ISO III upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

***Forks longer 1600 mm
cross section changes**

type	forks b x h mm
RZV 30-GS	125x50

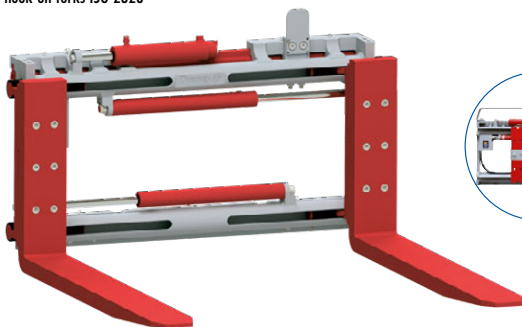

option: protection strip