



Sideshifting fork positioner

constant sideshift, bolt-on forks

The **sideshifting fork positioner RZV-GS** uses stable round bar guides for fork positioning. The simple design offers reliability and excellent operator visibility. The constant sideshift operates at any fork position.

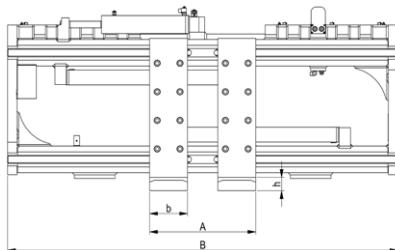

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	A mm	forks b x h x L mm	sideshift mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
RZV 50-GS	5,0/600	1020 1120 1120 1180	5000/600	IV	1250 1350 1450 1550	500-1340 500-1440 500-1540 500-1640	150x70x1200	+/- 100	180	278 272 265 262	242 243 248 249	649 661 687 713
RZV 55-GS	5,5/600	1020 1120 1120 1180	5500/600		1250 1350 1450 1550	500-1340 500-1440 500-1540 500-1640	150x70x1200	+/- 100	180	280 274 267 264	242 243 248 249	659 671 697 723
RZV 60-GS	6,0/600	1130 1050 1420 1300 1580	6000/600		1360 1460 1600 1660 1860	560-1460 560-1560 560-1700 560-1760 560-1960	150x70x1200	+/- 100 +/- 100 +/- 160 +/- 160 +/- 160	190	186 185 184 183 180	258 261 266 267 274	790 805 830 840 870
RZV 70-GS	6,5-7,0/600	1050 1300 1580 1680	7000/600		1460 1660 1860 2060	560-1560 560-1760 560-1960 560-2160	150x70x1200	+/- 100 +/- 160 +/- 160 +/- 160	190	188 186 183 180	261 267 274 280	835 880 930 980
RZV 80-GS	8,0/600	1050 1520 1580 1680 1680 1780 1780 1980	8000/600		1460 1800 1860 2000 2060 2160 2260 2400	560-1560 560-1900 560-1960 560-2100 560-2160 560-2260 560-2360 560-2500	200x70x1200	+/- 100 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160	190	195 189 189 187 186 185 183 179	257 258 259 262 265 267 268 271	915 975 985 995 1010 1035 1060 1110
RZV 100-GS	8,0/900	1520 1580 1780 1780 1780	8000/900		1800 1860 2060 2160 2260 2400	560-1900 560-1960 560-2160 560-2260 560-2360 560-2500	200x80x1200	+/- 160	216	185 184 180 178 175 172	260 261 267 268 270 273	1150 1170 1230 1260 1285 1340
RZV 110-GS	8,0/1100	1780	8000/1100		2060 2260 2400	560-2160 560-2360 560-2500	200x80x1200	+/- 160	218	190 186 183	267 270 273	1292 1348 1403

- 2 hydraulic functions required
- includes hoses and couplings

- constant sideshift as standard
- features bolt-on forks as standard
- load backrest/protection strip type LS-RP see page 248

- for hook-on forks ISO 2328
- quick release hooks ISO IV upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed



option: protection strip