
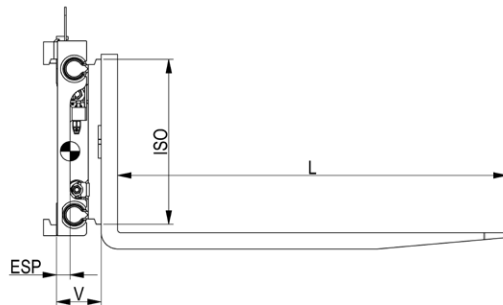


Sideshifting fork positioner

integral sideshift, bolt-on forks

The **sideshifting fork positioner RZV-G** uses stable round bar guides for fork positioning. The simple design offers reliability and excellent operator visibility. The valve sideshift is depending on fork position.

RZV-G
ISO II

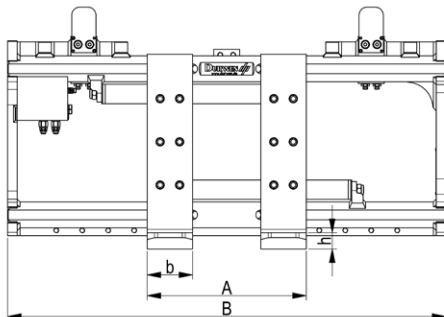



type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
RZV 16-G*	1,0-1,6/500	700 750 810	1600/500	II	850 980 1040	470-910 470-1040 470-1100	100x40x1200	126	229 228 224	126 124 130	215 220 228	145
RZV 20-G*	1,8-2,0/500	700 750 810 860	2000/500		850 980 1040 1100 1150	470-910 470-1040 470-1100 470-1160 470-1210	100x45x1200		225 222 221 219 218	123 122 126 127 128	220 224 232 237 242	155
RZV 25-G*	2,0/600-2,5/500	750 750 810 810 860 910 930	2500/500		980 1000 1040 1100 1150 1200 1350	490-1060 490-1080 490-1120 490-1180 490-1230 490-1280 490-1430	120x40x1200		220 220 218 216 215 215 213	116 118 120 121 122 123 124	229 230 239 244 252 257 268	165
RZV 28-G*	2,5/600	810 860 930	2500/600		1040 1150 1350	495-1125 495-1235 495-1435	125x45x1200		222 225 230	114 116 117	270 275 295	185

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve
- features bolt-on forks as standard
- for hook-on forks ISO 2328

- quick release hooks upon request (ISO II)
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed
- load backrest/protection strip type LS-RP see page 248

*Forks longer 1600 mm
cross section changes

type	forks b x h mm
RZV 16-G	100x50
RZV 20-G	100x50
RZV 25-G	120x50
RZV 28-G	125x50

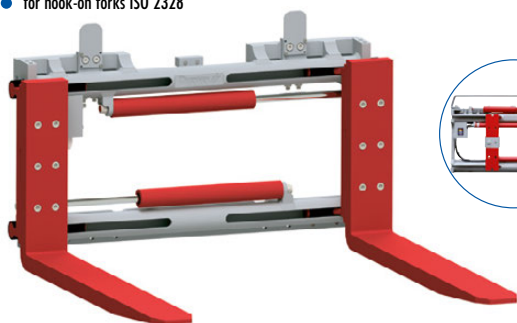

option: protection strip