
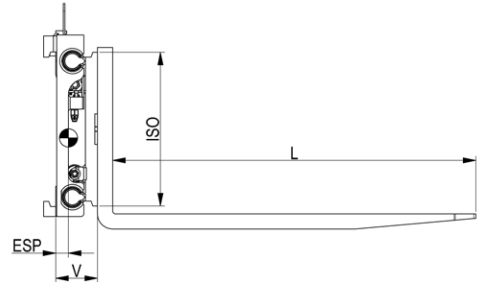


Sideshifting fork positioner

integral sideshift, bolt-on forks



The **sideshifting fork positioner RZV-G** uses stable round bar guides for fork positioning. The simple design offers reliability and excellent operator visibility. The valve sideshift is depending on fork position.

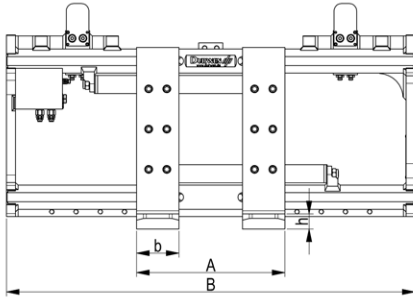

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
RZV 30-G*	3,0/500	990 810 860 930 950	3000/500	III	1040 1100 1150 1200 1350	495-1125 495-1185 495-1235 495-1285 495-1435	125x45x1200	138	210 208 205 204 203	164 164 164 164 165	290 297 305 312 320	205
RZV 35-G	3,0/600- 3,5/500	810 860 930 950	3500/500		1100 1150 1200 1350	490-1180 490-1230 490-1280 490-1430	140x50x1200	138	224 222 221 218	154 155 155 156	341 345 349 360	246
RZV 40-G	3,5/600- 4,0/500	840 840 1200 1300	4000/500		1150 1350 1550 1750	490-1230 490-1430 490-1630 490-1830	140x50x1200	153	228 225 220 215	164 166 170 171	388 400 415 430	250
RZV 45-G	4,0-5,0/600	840 920 700 790 840 940 1200 1300	5000/600		1150 1200 1250 1300 1350 1450 1550 1750	500-1240 500-1290 500-1340 500-1390 500-1440 500-1540 500-1640 500-1840	150x60x1200	153	228 227 226 226 225 223 220 215	153 153 153 153 154 156 159 160	435 439 443 447 450 458 465 480	296

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve
- features bolt-on forks as standard

- for hook-on forks ISO 2328
- quick release hooks ISO III upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed
- load backrest/protection strip type LS-RP see page 248

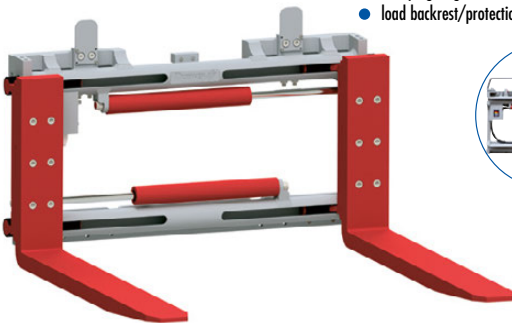

option: protection strip

*Forks longer 1600 mm cross section changes	
type	forks b x h mm
RZV 30-G	125x50