



Sideshifting fork positioner

integral sideshift, bolt-on forks

The **sideshifting fork positioner RZV-G** uses stable round bar guides for fork positioning. The simple design offers reliability and excellent operator visibility. The valve sideshift is depending on fork position.

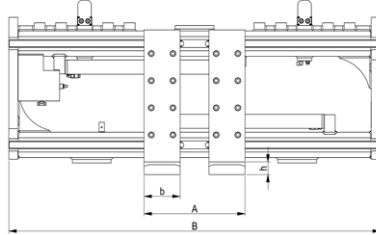


type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
RZV 50-G	5,0/600	860 945 1045 1060	5000/600	IV	1250 1350 1450 1550	500-1340 500-1440 500-1540 500-1640	150x70x1200	160	300 295 290 285	195 196 200 203	588 601 614 627	383
RZV 55-G	5,5/600	860 945 1045 1060	5500/600		1250 1350 1450 1550	500-1340 500-1440 500-1540 500-1640	150x70x1200	160	305 300 295 290	195 196 200 203	598 611 624 637	383
RZV 60-G	6,0/600	890 1010 1080 1140 1240	6000/600		1360 1460 1600 1660 1860	560-1460 560-1560 560-1700 560-1760 560-1960	150x70x1200	165	186 185 184 183 180	235 237 240 243 249	730 745 770 780 810	394
RZV 70-G	6,5-7,0/600	1010 1140 1240 1340	7000/600		1460 1660 1860 2060	560-1560 560-1760 560-1960 560-2160	150x70x1200	165	188 186 183 180	237 243 249 255	765 805 845 885	398
RZV 80-G	8,0/600	1010 1180 1240 1340 1440 1540 1680	8000/600		1460 1800 1860 2000 2060 2160 2260 2400	560-1560 560-1900 560-1960 560-2100 560-2160 560-2260 560-2360 560-2500	200x70x1200	165	195 189 189 187 186 185 183 179	232 234 235 239 241 243 244 246	790 875 890 920 930 955 980 1030	510
RZV 100-G	8,0/900	1200 1300 1340 1760 1540 1680	8000/900		1800 1860 2060 2160 2260 2400	560-1900 560-1960 560-2160 560-2260 560-2360 560-2500	200x80x1200	190	185 184 180 178 175 172	238 241 244 245 247 249	1040 1060 1120 1150 1180 1210	586
RZV 110-G	8,0/1100	1340 1540 1680	8000/1100		2060 2260 2400	560-2160 560-2360 560-2500	200x80x1200	192	190 185 182	244 247 249	1185 1242 1272	586

- 2 hydraulic functions required
- includes hoses and couplings

- includes sideshift via valve
- features bolt-on forks as standard
- load backrest/protection strip type LS-RP see page 248

- for hook-on forks ISO 2328
- quick release hooks upon request (ISO IV)
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed



option: protection strip