


Fork positioner

**RZV-IG
ISO II**

integrated, integral sideshift, bolt-on forks

The fork positioner RZV-IG with bolt-on forks has stable round bar guides in which the two mounting plates with forks are moved. Sideshift by valve allows sideshift depending on the opening range of the fork mounts. Standard ISO 2328 forks can also be used and the fork length can be up to 2400 mm. Very good visibility is to be emphasized which makes safe working possible. Euro pallets can be picked up lengthwise. In addition, this device is characterised by its compact design whereby the forklift retains the greatest possible residual load capacity. Delivery incl. brackets, stubshafts and chain anchors.

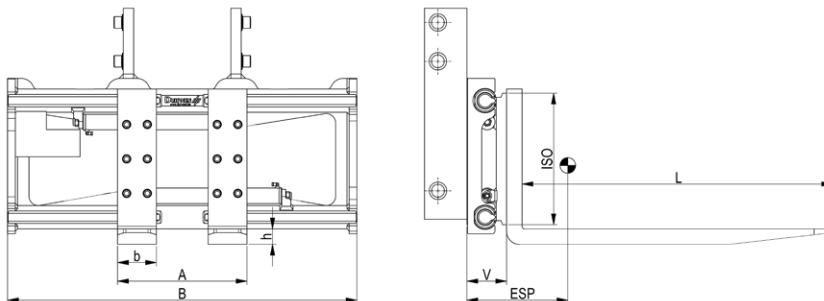



type	lift truck to LC mm	capacity kg LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
RZV 16-IG*	1,0-1,6/500	1600/500	II	850 980 1040	470-910 470-1040 470-1100	100x40x1200	126	255 250 250	129 127 133	215 225 235	145
RZV 20-IG*	1,8-2,0/500	2000/500		850 980 1040 1150	470-910 470-1040 470-1100 470-1210	100x45x1200		280 270 265 265	125 128 130 133	225 240 245 250	155
RZV 25-IG*	2,0/600-2,5/500	2500/500		980 1040 1150 1350	490-1060 490-1120 490-1230 490-1430	120x40x1200		270 270 270 265	125 124 126 124	245 255 260 270	165
RZV 28-IG*	2,5/600	2500/600		1040 1150 1350	495-1125 495-1235 495-1435	125x45x1200		295 290 285	124 126 124	273 280 305	185

- 2 hydraulic functions required
- without hoses and couplings
- features bolt-on forks as standard
- sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as forklift model and mast model details

- weight, COG and LLC do not include brackets
- LLC does not include forks
- protection strip/load backrest see page 248
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

***Forks longer 1600 mm
cross section changes**

type	forks b x h mm
RZV 16-IG	100x50
RZV 20-IG	100x50
RZV 25-IG	120x50
RZV 28-IG	125x50

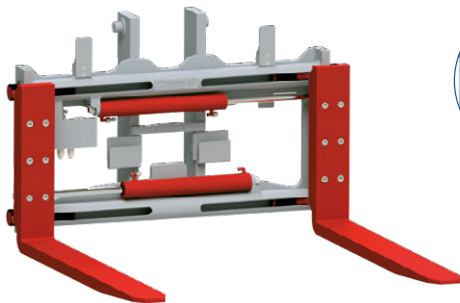

option: protection strip