


Fork positioner

RZV-IG
ISO III

integrated, integral sideshift, bolt-on forks

The fork positioner RZV-IG with bolt-on forks has stable round bar guides in which the two mounting plates with forks are moved. Sideshift by valve allows sideshift depending on the opening range of the fork mounts. Standard ISO 2328 forks can also be used and the fork length can be up to 2400 mm. Very good visibility is to be emphasized which makes safe working possible. Euro pallets can be picked up lengthwise. In addition, this device is characterised by its compact design whereby the forklift retains the greatest possible residual load capacity. Delivery incl. brackets, stubshafts and chain anchors.

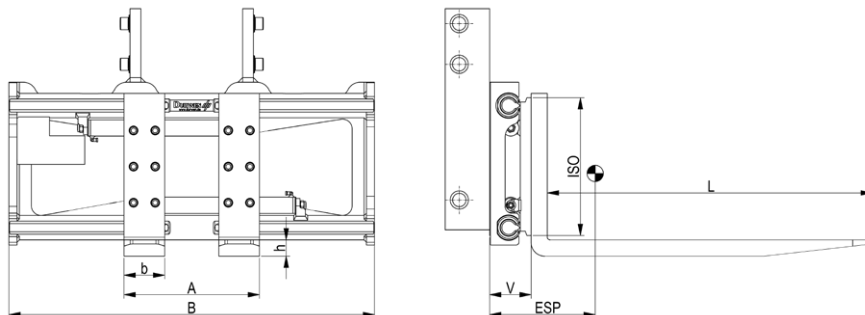



type	lift truck to LC mm	capacity kg LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
RZV 30 -IG*	3,0/500	3000/500	III	1040	495-1125	125x45x1200	138	273	161	300	205
				1150	495-1235			270	163	310	
				1350	495-1435			265	168	325	
RZV 35-IG	3,0/600- 3,5/500	3500/500		1150	490-1230	140x50x1200	138	295	155	350	246
				1350	490-1430			285	158	365	
RZV 40-IG	3,5/600- 4,0/500	4000/500		1150	490-1230	140x50x1200	153	270	149	410	250
				1350	490-1430			260	151	430	
				1550	490-1630			250	153	450	
				1750	490-1830			240	155	470	
RZV 45-IG	4,0/600- 5,0/500	5000/500		1150	500-1240	150x60x1200	153	300	159	455	296
				1350	500-1440			290	163	478	
				1550	500-1640			280	167	495	
				1750	500-1840			270	165	515	
RZV 48-IG	5,0/600	5000/600		1150	500-1240	150x60x1200	153	300	159	460	296
				1350	500-1440			290	163	490	
				1550	500-1640			280	167	505	
				1750	500-1840			270	165	520	

- 2 hydraulic functions required
- without hoses and couplings
- features bolt-on forks as standard
- sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as forklift model and mast model details

- weight, COG and LLC do not include brackets
- LLC does not include forks
- protection strip/load backrest see page 248
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

*Forks longer 1600 mm
cross section changes

type	forks b x h mm
RZV 30-IG	125x50

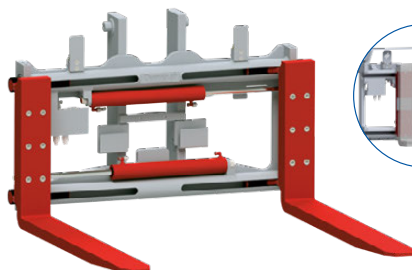

option: protection strip