


Fork positioner

RZV-IG
ISO IV

integrated, integral sideshift, bolt-on forks

The fork positioner RZV-IG with bolt-on forks has stable round bar guides in which the two mounting plates with forks are moved. Sideshift by valve allows sideshift depending on the opening range of the fork mounts. Standard ISO 2328 forks can also be used and the fork length can be up to 2400 mm. Very good visibility is to be emphasized which makes safe working possible. Euro pallets can be picked up lengthwise. In addition, this device is characterised by its compact design whereby the forklift retains the greatest possible residual load capacity. Delivery incl. brackets, stubshafts and chain anchors.


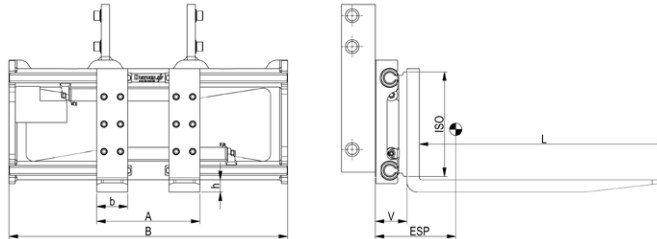


type	lift truck to LC mm	capacity kg LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
RZV 50-IG	5,0/600	5000/600	IV	1250 1350 1450 1550	500-1340 500-1440 500-1540 500-1640	150x70x1200	160	300 295 290 285	203 205 209 212	587 600 615 630	383
RZV 55-IG	5,5/600	5500/600		1250 1350 1450 1550	500-1340 500-1440 500-1540 500-1640	150x70x1200	160	305 300 295 290	203 205 209 212	595 610 625 640	383
RZV 60-IG	6,0/600	6000/600		1460 1860	560-1560 560-1960	150x70x1200	165	240 225	221 231	710 770	394
RZV 70-IG	6,5-7,0/600	7000/600		1460 1860 2060	560-1560 560-1960 560-2160	150x70x1200	165	235 220 215	233 233 233	720 780 820	398
RZV 80-IG	8,0/600	8000/600		1800 1860 2060 2160 2260 2400	560-1900 560-1960 560-2160 560-2260 560-2360 560-2500	200x70x1200	165	245 240 235 233 225 220	216 219 222 226 226 224	885 895 930 948 965 995	510
RZV 100-IG	8,0/900	8000/900		1800 1860 2060 2160 2260 2400	560-1900 560-1960 560-2160 560-2260 560-2360 560-2500	200x80x1200	190	245 244 240 238 235 230	231 234 237 234 231 228	1070 1085 1135 1160 1185 1230	586
RZV 110-IG	8,0/1100	8000/1100		2060 2260 2400	560-2160 560-2360 560-2500	200x80x1200	192	243 238 233	237 232 228	1150 1200 1245	586

- 2 hydraulic functions required
- without hoses and couplings
- features bolt-on forks as standard
- sideshift via valve, depending on opening range

- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as forklift model and mast model details

- weight, COG and LLC do not include brackets
- LLC does not include forks
- protection strip/load backrest see page 248
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed



option: protection strip