
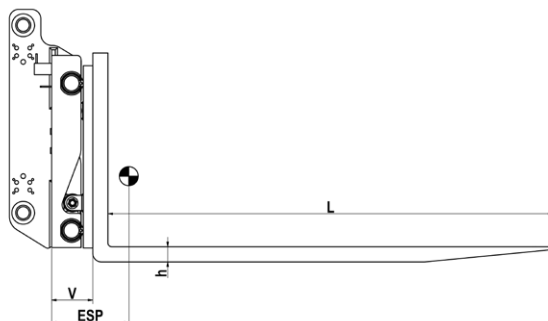


Fork positioners for heavy forklift trucks

integrated, integral sideshift, bolt-on forks

The **fork positioner type RZV-IG** with bolt-on forks has stable round bar guides in which the two mounting plates with forks are moved. Sideshift by valve allows sideshift depending on the opening range (A). At the end positions, sideshift is not possible. Excellent visibility makes safe working possible. Euro pallets can be picked up lengthwise with units up to 200 mm fork width.

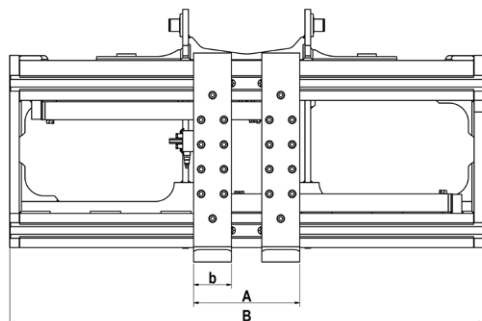

type	lift truck to LC mm	capacity kg LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	COG/ESP hor. mm	COG/ESP* vert. mm	weight kg	moving mass kg
RZV 95-IG	10,0/600	10000/600	integral	2400	560-2500	200x80x2400	217	401	455	2085	1015
RZV 105-IG	10,0/900	10000/900			560-2500	200x85x2400	217	503	448	2235	1060
RZV 120-IG	12,0/600	12000/600			560-2500	200x80x2400	217	433	455	2180	1015
RZV 130-IG	12,0/1200	12000/1200			560-2600	250x90x2400	285	525	424	2620	1335
RZV 140-IG	14,0/600	14000/600			560-2500	200x90x2400	265	450	444	2315	1110
RZV 150-IG	14,0/1200	14000/1200			560-2600	250x90x2400	285	525	424	2620	1335
RZV 160-IG	16,0/600	16000/600			560-2500	200x90x2400	265	480	444	2385	1110
RZV 180-IG	18,0/600	18000/600			560-2500	250x90x2400	285	525	424	2620	1335
RZV 190-IG	16,0/1200	16000/1200			560-2500	250x100x2400	285	555	415	2750	1455

- 2 hydraulic functions required
- ready to connect, access metric
- features bolt-on forks as standard
- includes sideshift via valve
- including brackets, chain anchor and stub shafts, without rollers

- weight does not include brackets
- COG from front face of brackets
- LLC (V) from front face of brackets plus fork thickness
- clamping of goods is not allowed

*COG/ESP vertically from the ground

