


Sideshifting fork positioner

integral sideshift, no forks

RZV
ISO III

The **sideshifting fork positioner RZV** uses stable round bar guides for positioning of fork adaptors. The simple design offers reliability and excellent operator visibility. Hook-on forks can be used. The integral sideshift is depending on fork position.


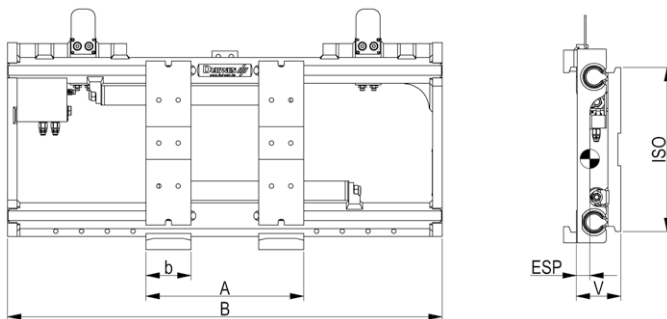


type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	A mm	b forks mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
RZV 30	3,0/500	990 810 860 930 950	3000/500	III	1040 1100 1150 1200 1350	490-1120 490-1180 490-1230 490-1280 490-1430	120	138	55 57 60 60 60	274 272 272 271 266	145 153 160 166 175	59
RZV 35	3,0/600- 3,5/500	810 860 930 950	3500/500		1100 1150 1200 1350	490-1180 490-1230 490-1280 490-1430	140	138	65	272 271 270 266	162 165 168 180	64
RZV 45	3,5/600- 5,0/600	840 920 700 790 840 940 1200 1300	5000/600		1150 1200 1250 1300 1350 1450 1550 1750	490-1230 490-1280 490-1330 490-1380 490-1430 490-1530 490-1630 490-1830	140	153	70	264 262 261 259 258 257 259 254	205 208 212 215 220 228 235 250	66


- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve
- for hook-on forks ISO 2328

- bolt-on forks can be used
- forks not included
- please indicate fork width when ordering
- quick release hooks ISO III upon request

- load backrest/protection strip type LS-RP see page 248
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

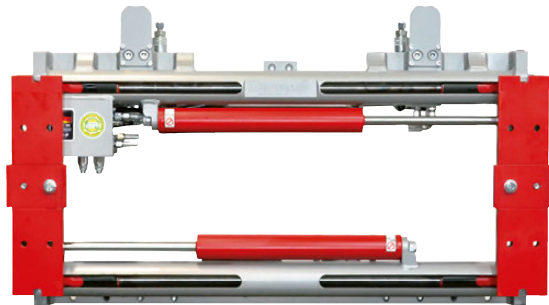

option: protection strip



fork lock