


Sideshifting fork positioner

integral sideshift, no forks

The **sideshifting fork positioner RZV** uses stable round bar guides for positioning of fork adaptors. The simple design offers reliability and excellent operator visibility. Hook-on forks can be used. The integral sideshift is depending on fork position.


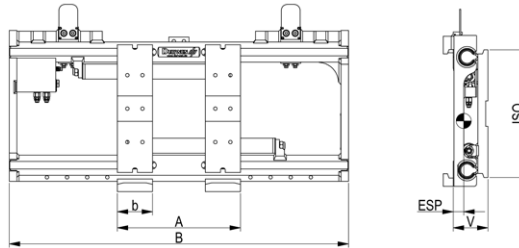


type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	A mm	b forks mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
RZV 50	5,0/600	860 945 1045 1060	5000/600	IV	1250 1350 1450 1550	490-1330 490-1430 490-1530 490-1630	140	160	68	315 317 323 323	292 305 318 331	97
RZV 55	5,5/600	860 945 1045 1060	5500/600		1250 1350 1450 1550	490-1330 490-1430 490-1530 490-1630	140	160	70	315 317 323 323	302 315 328 341	97
RZV 60	6,0/600	890 1010 1080 1140 1240	6000/600		1360 1460 1600 1660 1860	560-1460 560-1560 560-1700 560-1760 560-1960	150	165	72	339 339 340 341 343	430 450 480 490 530	110
RZV 70	6,5-7,0/600	1010 1140 1240 1340	7000/600		1460 1660 1860 2060	560-1560 560-1760 560-1960 560-2160	150	165	74	339 341 343 345	460 500 535 545	115
RZV 80	8,0/600	1010 1180 1240 1340 1340 1440 1540 1680	8000/600		1460 1800 1860 2000 2060 2160 2260 2400	560-1560 560-1900 560-1960 560-2100 560-2160 560-2260 560-2360 560-2500	200	165	75	343 342 342 342 341 341 341 341	485 535 545 547 550 570 590 635	135
RZV 100	8,0/900	1200 1300 1340 1540 1540 1680	8000/900		1800 1860 2060 2160 2260 2400	560-1900 560-1960 560-2160 560-2260 560-2360 560-2500	200	190	70	337 337 338 338 338 339	640 650 700 725 750 810	162
RZV 110	8,0/1100	1340 1540 1680	8000/1100		2060 2260 2400	560-2160 560-2360 560-2500	200	192	73	338 338 339	715 765 825	162

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve

- for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included

- please indicate fork width when ordering
- quick release hooks ISO IV upon request
- load backrest/protection strip type LS-RP see page 248
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed



fork lock