


Fork positioner

RZV-I
ISO II/III

integrated, integral sideshift, no forks

The fork positioner RZV-I has a stable round guide in which the two mounting plates are moved. Sideshift by valve allows sideshift depending on the opening range of the fork mounts. Standard forks according to ISO 2328 are used but bolt-on forks from our company can be retrofitted at any time. Very good visibility is to be emphasized which makes safe working possible. Euro pallets can be picked up lengthwise. In addition, this device is characterised by its compact design whereby the forklift retains the greatest possible residual load capacity. The delivery of the integrated fork positioner includes brackets, stubshafts and chain anchors.


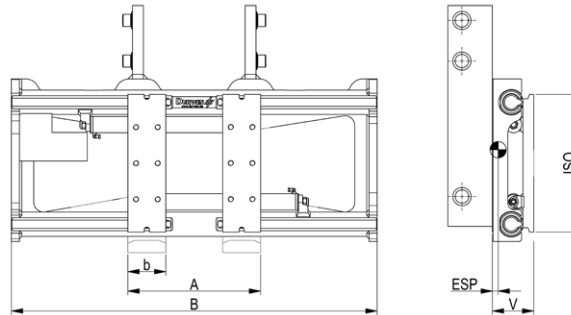


type	lift truck to LC mm	capacity kg LC mm	ISO	B mm	A mm	b forks mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
RZV 25-I	1,5 - 2,5/500	2500/500	II	980	490-1060	120	126	50	221	130	45
				1040	490-1120				216	135	
				1150	490-1230				214	142	
				1350	490-1430				212	155	
RZV 28-I	2,5/600	2500/600	II	1040	490-1120	120	126	50	205	130	45
				1150	490-1230				213	142	
				1350	490-1430				211	155	
RZV 30-I	3,0/500	3000/500	III	1040	490-1120	120	138	55	264	160	59
RZV 35-I	3,0/600- 3,5/500	3500/500	III	1150	490-1230	140	138	55	266	168	64
				1350	490-1430				266	180	
									266		
RZV 45-I	3,5/600- 5,0/500	5000/500	III	1150	490-1230	140	153	60	268	222	66
				1350	490-1430				265	240	
				1550	490-1630				263	260	
				1750	490-1830				261	280	
RZV 48-I	5,0/600	5000/600	III	1150	490-1230	140	153	60	268	227	66
				1350	490-1430				265	245	
				1550	490-1630				263	265	
				1750	490-1830				261	285	

- 2 hydraulic functions required
- without hoses and couplings
- includes sideshift via valve, depending on opening range
- for hook-on forks ISO 2328

- bolt-on forks can be used
- forks not included
- please indicate fork width when ordering
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as forklift model and mast model details

- weight, COG and LLC do not include brackets
- LLC does not include forks
- protection strip/load backrest see page 248
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

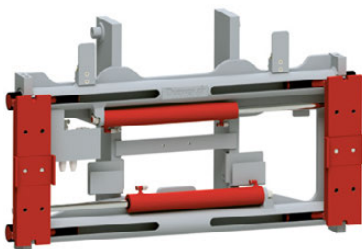

option: protection strip