


Fork positioner

RZV-I
ISO II/III

integrated, integral sideshift, no forks

The fork positioner RZV-I has a stable round guide in which the two mounting plates are moved. Sideshift by valve allows sideshift depending on the opening range of the fork mounts. Standard forks according to ISO 2328 are used but bolt-on forks from our company can be retrofitted at any time. Very good visibility is to be emphasized which makes safe working possible. Euro pallets can be picked up lengthwise. In addition, this device is characterised by its compact design whereby the forklift retains the greatest possible residual load capacity. The delivery of the integrated fork positioner includes brackets, stubshafts and chain anchors.

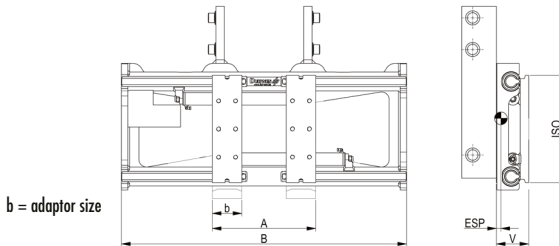


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	b (forks) mm	V LLC mm	ESP COG mm	weight kg
RZV 25-I	2500/500	1,5 - 2,5/500	II	980	490-1060	120	126	50	130
				1040	490-1120				135
				1150	490-1230				142
				1350	490-1430				155
RZV 28-I	2500/600	2,5/600	II	1040	490-1120	120	126	50	130
				1150	490-1230				142
				1350	490-1430				155
RZV 30-I	3000/500	3,0/500	III	1040	490-1120	120	138	55	160
				1150	490-1230				168
				1350	490-1430				180
RZV 35-I	3500/500	3,0/600- 3,5/500	III	1150	490-1230	140	138	55	170
				1350	490-1430				190
RZV 45-I	5000/500	3,5/600- 5,0/500	III	1150	490-1230	140	153	60	222
				1350	490-1430				240
				1550	490-1630				260
				1750	490-1830				280
				2000	490-2080				305
RZV 48-I	5000/600	5,0/600	III	1150	490-1230	140	153	60	227
				1350	490-1430				245
				1550	490-1630				265
				1750	490-1830				285
				2000	490-2080				310

- 2 hydraulic functions required
- without hoses and couplings
- includes sideshift via valve, depending on opening range
- for hook-on forks ISO 2328

- bolt-on forks can be used
- forks not included
- please indicate fork width when ordering
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details

- weight, COG and LLC do not include brackets
- LLC does not include forks
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed



DURWEN 
Forklift Attachments

More than 75 years experience