


Fork positioner

**RZV-I
ISO IV**

integrated, integral sideshift, bolt-on forks

The fork positioner RZV-I has a stable round guide in which the two mounting plates are moved. Sideshift by valve allows ideshift depending on the opening range of the fork mounts. Standard forks according to ISO 2328 are used but bolt-on forks from our company can be retrofitted at any time. Very good visibility is to be emphasized which makes safe working possible. Euro pallets can be picked up lengthwise. In addition, this device is characterised by its compact design whereby the forklift retains the greatest possible residual load capacity. The delivery of the integrated fork positioner includes brackets, stubshafts and chain anchors.


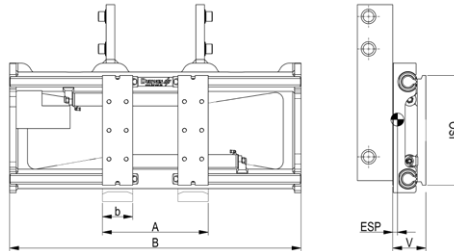


type	lift truck to LC mm	capacity kg LC mm	ISO	B mm	A mm	b forks mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
RZV 50-I	5,0/600	5000/600	IV	1250 1350 1450 1550	490-1330 490-1430 490-1530 490-1630	140	160	65	336 334 334 332	285 300 315 330	97
RZV 55-I	5,5/600	5500/600		1250 1350 1450 1550	490-1330 490-1430 490-1530 490-1630	140	160	67	336 334 334 332	298 310 325 340	97
RZV 60-I	6,0/600	6000/600		1460 1860	560-1560 560-1960	150	165	65	325 324	425 485	110
RZV 70-I	6,5-7,0/600	7000/600		1460 1860 2060	560-1560 560-1960 560-2160	150	165	65	329 327 321	435 495 530	115
RZV 80-I	8,0/600	8000/600		1800 1860 2060 2160 2260 2400	560-1900 560-1960 560-2160 560-2260 560-2360 560-2500	200	165	65	325 323 320 323 321 319	515 525 555 573 590 620	135
RZV 100-I	8,0/900	8000/900		1800 1860 2060 2160 2260 2400	560-1900 560-1960 560-2160 560-2260 560-2360 560-2500	200	190	75	321 321 322 331 322 320	655 670 715 738 760 810	162
RZV 110-I	8,0/1100	8000/1100		2060 2260 2400	560-2160 560-2360 560-2500	200	192	77	322 320 320	730 775 825	162

- 2 hydraulic functions required
- without hoses and couplings
- includes sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- bolt-on forks can be used

- forks not included
- please indicate fork width when ordering
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as forklift model and mast model details
- weight, COG and LLC do not include brackets

- LLC does not include forks
- protection strip/load backrest see page 248
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed



option: protection strip