



Sideshifting fork positioner

RZV-S
ISO II

constant sideshift, no forks

The **sideshifting fork positioner RZV-S** uses stable round bar guides for positioning of forks. The simple design offers reliability and excellent operator visibility. Hook-on forks can be used. The constant sideshift operates at any fork position.


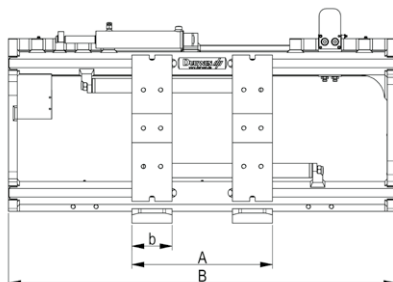


type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	A mm	b forks mm	sideshift mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
RZV 20-S	1,0-2,0/500	840 840 900 990 1040	2000/500	II	980 1000 1040 1100 1150	490-1060 490-1080 490-1120 490-1180 490-1230	120	+/- 100	142	45	231 231 232 230 229	132 135 139 140 142
RZV 25-S	2,0/600- 2,5/500	840 840 900 990 1040 1040 1110	2500/500		980 1000 1040 1100 1150 1200 1350	490-1060 490-1080 490-1120 490-1180 490-1230 490-1280 490-1430				50	231 231 231 230 230 230 227	135 138 142 147 150 152 160
RZV 28-S	2,5/600	900 1040 1110	2500/600		1040 1150 1350	490-1120 490-1230 490-1430				50	231 230 227	147 155 165

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- for hook-on forks ISO 2328
- bolt-on forks can be used

- forks not included
- please indicate fork width when ordering
- load backrest/protection strip type LS-RP see page 248
- quick release hooks upon request (ISO II)

- for forks up to 2400 mm
- clamping of goods is not allowed

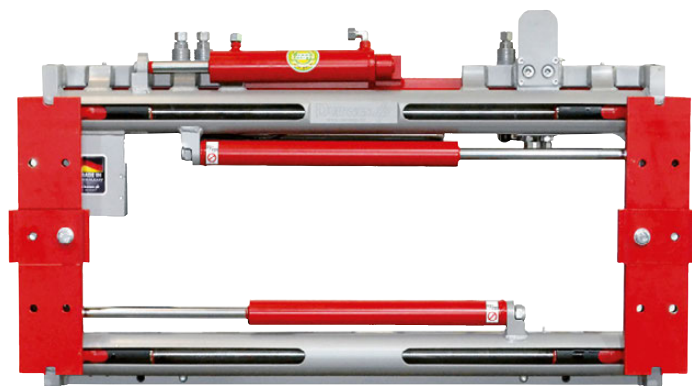

option: protection strip



fork lock