


Sideshifting fork positioner

RZV-S
ISO IV

constant sideshift, no forks

The **sideshifting fork positioner RZV-S** uses stable round bar guides for positioning of forks. The simple design offers reliability and excellent operator visibility. Hook-on forks can be used. The constant sideshift operates at any fork position.


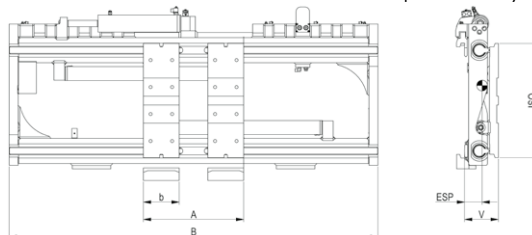


type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	A mm	b forks mm	sideshift mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
RZV 50-S	5,0/600	1020 1120 1120 1180	5000/600	IV	1250 1350 1450 1550	490-1330 490-1430 490-1530 490-1630	140	+/-100	180	73	387 387 386 384	345 357 383 409
RZV 55-S	5,5/600	1020 1120 1120 1180	5500/600		1250 1350 1450 1550	490-1330 490-1430 490-1530 490-1630	140	+/-100	180	74	387 387 386 384	355 367 393 419
RZV 60-S	6,0/600	1130 1050 1420 1300 1580	6000/600		1360 1460 1600 1660 1860	560-1460 560-1560 560-1700 560-1760 560-1960	150	+/- 100 +/- 100 +/- 160 +/- 160 +/- 160	190	75	366 365 367 367 369	490 510 540 550 590
RZV 70-S	6,5-7,0/600	1050 1300 1580 1680	7000/600		1460 1660 1860 2060	560-1560 560-1760 560-1960 560-2160	150	+/- 100 +/- 160 +/- 160 +/- 160	190	73	365 367 369 371	520 560 595 645
RZV 80-S	8,0/600	1050 1520 1580 1680 1680 1780 1780 1980	8000/600		1460 1800 1860 2000 2060 2160 2260 2400	560-1560 560-1900 560-1960 560-2100 560-2160 560-2260 560-2360 560-2500	200	+/- 100 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160	190	72	368 368 367 368 369 369 367 367	540 590 600 605 650 670 690 740
RZV 100-S	8,0/900	1520 1580 1680 1780 1780 1780	8000/900		1800 1860 2060 2160 2260 2400	560-1900 560-1960 560-2160 560-2260 560-2360 560-2500	200	+/- 160	216	70	363 363 365 365 363 363	730 740 800 830 855 910
RZV 110-S	8,0/1100	1680 1780 1780	8000/1100		2060 2260 2400	560-2160 560-2360 560-2500	200	+/- 160	218	72	365 363 363	820 875 930

- 2 hydraulic functions required
- includes hoses and couplings

- constant sideshift as standard
- for hook-on forks ISO 2328
- bolt-on forks can be used

- forks not included
- please indicate fork width when ordering
- load backrest/protection strip type LS-RP see page 248
- quick release hooks ISO IV upon request
- for forks up to 2400 mm
- clamping of goods is not allowed

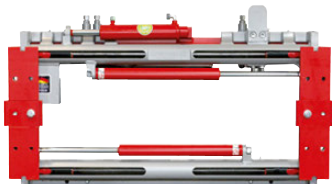

option:
protection strip



fork lock

DURWEN 
Forklift Attachments

PL 01-2026