


Telescopic forks

RZV-S-TGZ
ISO II

with fork positioner and constant sideshift

The **RZV-S-TGZ** is a combination of fork positioner and telescopic forks that enables quick and cost effective loading and stacking especially when loading and unloading from one side of a vehicle. The unit copes with a variety of logistical needs including different pallet sizes and load dimensions. The telescopic forks feature 100% synchronised reach movement for ease of use. Fork pockets feature +2mm wear resistant mangan steel wear zone as standard.

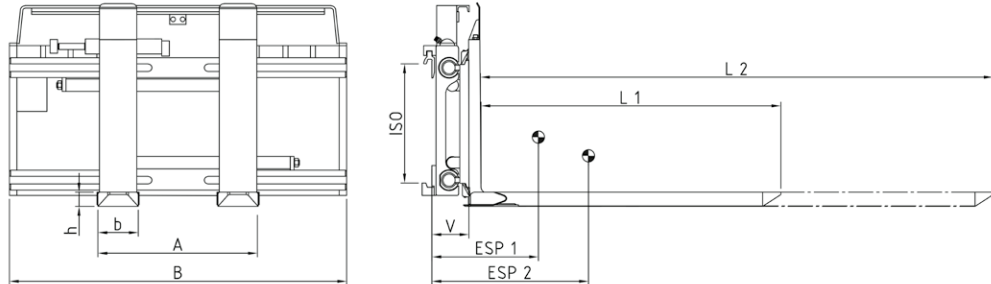

type	lift truck to LC mm	min. carriage mm	capacity kg LC 1 mm	capacity kg LC 2 mm	ISO	B mm	opening range A OTO mm	retracted extended L1/L2 mm	fork b x h mm	fork back mm	sideshift mm	V LLC mm	COG/ESP hor. 1/2 mm	COG/ESP vert. mm	weight kg
RZV-S-TGZ.20.1200*	1,0- 2,0/500	900	2000/500	950/1450	II	1040	500-1130	1200/2050 1350/2350	131x57	120x45	+/- 100	142	315/415 360/485	164 156	348 362
RZV-S-TGZ.20.1350*		900	2000/500	810/1750		1040	530-1160	1200/2050	161x57	150x45			340/455 330/445	154 157	382 390
RZV-S-TGZ.22.1200	1,0- 2,0/500	900	2000/500	950/1450		1040	530-1160	1200/2050	161x57	150x45			385/535 380/525	146 148	400 408
RZV-S-TGZ.22.1350	1,0- 2,0/500	900	2000/500	810/1750		1150	530-1270	1350/2350	161x57	150x45			335/455 330/445	154 158	384 392
RZV-S-TGZ.25.1200	2,0- 2,5/600	900	2500/600	1200/1450		1040	530-1160	1200/2050	161x57	150x45			385/530 380/525	146 149	400 410
RZV-S-TGZ.25.1350	2,0- 2,5/600	900	2500/600	1000/1750		1150	530-1270	1350/2350	161x57	150x45					

- 3 hydraulic functions required
- includes hoses and couplings
- protection strip with integrated hose guide as standard
- standard with easily replaceable wear zones and fork tip made of solid steel to reduce service costs
- thicker mangan steel wear zone (+6 mm) ISO II upon request

- hook-on TGZ ISO 2328 as standard
- bolt-on forks ISO II upon request (drilling pattern changes, please ask)
- pallet stop ISO II upon request (see page 202):
 - A) 75 mm on the fork pocket sides
 - B) 400 mm
 - C) 850 mm
- type B and C reduce the useable length by 50 mm
- different pallet stop positions upon request
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- ISO type B mounting (ISO II) upon request

* 1 cylinder model

