
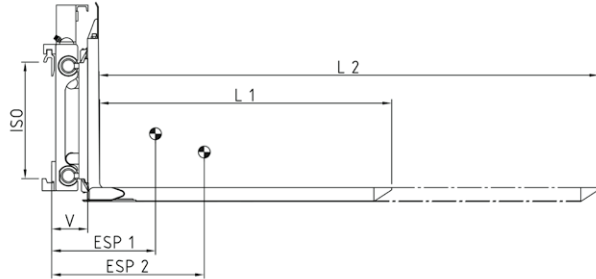


Telescopic forks

RZV-S-TGZ
ISO III

with fork positioner and constant sideshift

The **RZV-S-TGZ** is a combination of fork positioner and telescopic forks that enables quick and cost effective loading and stacking especially when loading and unloading from one side of a vehicle. The unit copes with a variety of logistical needs including different pallet sizes and load dimensions. The telescopic forks feature 100% synchronised reach movement for ease of use. Fork pockets feature +2mm wear resistant mangan steel wear zone as standard.



type	lift truck to LC mm	min. carriage mm	capacity kg LC 1 mm	capacity kg LC 2 mm	ISO	B mm	opening range A OT0 mm	retracted extended L1/L2 mm	fork b x h mm	fork back mm	sideshift mm	V LLC mm	COG/ESP hor. 1/2 mm	COG/ESP vert. mm	weight kg
RZV-S-TGZ.35.1200	3,0- 3,5/500	700 1040	3500/500	1630/1450	III	1040 1150	510-1140 510-1250	1200/2050	161 x 57	150x45	+/- 100	152	325/430 320/425	200 203	420 430
RZV-S-TGZ.35.1350	3,0- 3,5/500	700 1040	3500/500	1390/1750		1040 1150	510-1140 510-1250	1350/2350	161 x 57	150x45		152	370/505 360/495	190 193	438 445
RZV-S-TGZ.40.1200	3,5/600- 4,0/500	1020 1160	4000/500	1850/1450		1150 1350	510-1250 510-1450	1200/2050	161 x 57	150x45		168	305/405 295/390	209 214	470 494
RZV-S-TGZ.40.1350	3,5/600- 4,0/500	1020 1160	4000/500	1550/1750		1150 1350	510-1250 510-1450	1350/2350	161 x 57	150x45		168	350/470 335/450	200 205	488 510
RZV-S-TGZ.45.1200 RZV-S-TGZ.45.1350	4,0- 5,0/600	1160	5000/600	2300/1450 1900/1750		1350	510-1450	1200/2050 1350/2350	161 x 62	150x50		168	310/400 350/470	209 199	516 536

- 3 hydraulic functions required
- includes hoses and couplings
- protection strip with integrated hose guide as standard
- standard with easily replaceable wear zones and fork tip made of solid steel to reduce service costs
- thicker mangan steel wear zone (+6 mm) ISO III upon request

- hook-on TGZ ISO 2328 as standard
- bolt-on forks ISO III upon request (drilling pattern changes, please ask)
- pallet stop ISO III (see page 202):
 - A) 75 mm on the fork pocket sides
 - B) 400 mm
 - C) 850 mm
- type B and C reduce the useable length by 50 mm
- different pallet stop positions upon request
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- for ISO type B mounting (ISO III) upon request

