
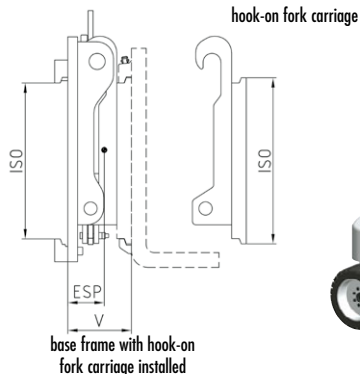


Quick-change system

SWV
ISO II/III

manual operation

With the Durwen **quick-change unit SWV**, attachments can be changed quickly and without the use of tools. This device is suitable when the truck is used for a wide range of applications and several attachments are needed. The lower locking mechanism is manually operated as standard. The fork carriage is hooked into the upper mounting of the base frame.

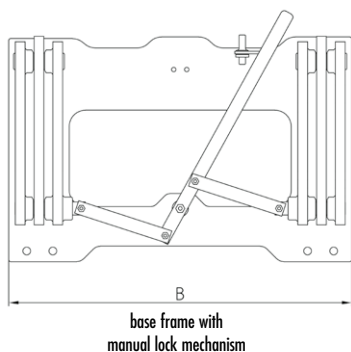

quick change unit, hook-on base frame							
type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	COG/ESP hor. mm	weight kg
SWV 25	1,0 - 2500/600	1000	2500/600	II	1050	30	105
SWV 35	3,0 - 3500/600		3500/600	III		32	175
SWV 45	4,0 - 5000/600		5000/600	III		38	180

single hook-on fork carriage, for additional ISO forks or attachment			
type	ISO	B mm	weight kg
fork carriage for SWV 25	II	1050	65
fork carriage for SWV 35	III	1150	123
fork carriage for SWV 45	III	1350	150

● hooks can be welded directly on some Durwen attachments for reduced lost load center and higher residual capacity. SWV 25, SWV 35, SWV 45 upon request. No add-on price for integral attachments - choose from this catalogue. Option available for: PGK, PBK, PZK, USK, KKP (all), ZVP, RZV, PZV, RZV-TGZ, ZVP-TGZ

technical data quick change unit (base frame) incl. fork carriage with hooks				
type	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
SWV 25 + fork carriage	140	62	285	170
SWV 35 + fork carriage	195	85	365	298
SWV 45 + fork carriage	205	95	364	330

constant sideshift upon request (requires one additional hydraulic function)	extra weight kg	extra thickness mm
constant sideshift ISO II	+20 kg	+17 mm
constant sideshift ISO III	+25 kg	



● multiple quick coupling upon request

- hydraulic locking upon request
- parking devices for attachments upon request
- integral version upon request

DURWEN 
Forklift Attachments

PL 01-2026