
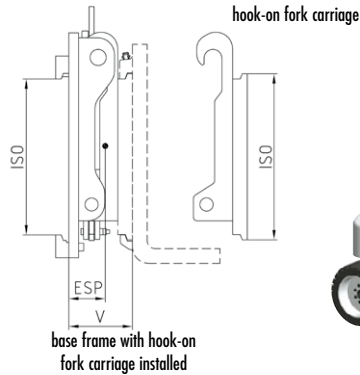


Quick-change system

manual operation

With the Durwen **quick-change unit SWV**, attachments can be changed quickly and without the use of tools. This device is suitable when the truck is used for a wide range of applications and several attachments are needed. The lower locking mechanism is manually operated as standard. The fork carriage is hooked into the upper mounting of the base frame.

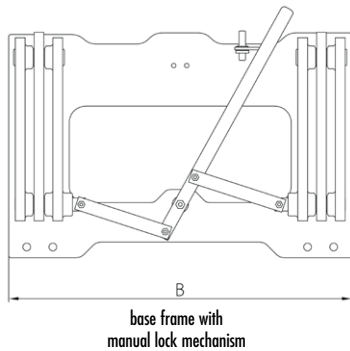

quick change unit, hook-on base frame							
type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	COG/ESP hor. mm	weight kg
SWV 60	6,0/600	1000	6000/600	IV	1100	40	280
SWV 80	7,0-8,0/600		8000/600			28	345
SWV 110	8,0/900 8,0/1100		8000/1100			45	388

single hook-on fork carriage, for additional ISO forks or attachment			
type	ISO	B mm	weight kg
fork carriage for SWV 60	IV	1500	300
fork carriage for SWV 80	IV	1800	345
fork carriage for SWV 110	IV	1800	355

- hooks can be welded directly on some Durwen attachments for reduced lost load center and higher residual capacity. SWV ISO IV upon request. No add-on price for integral attachments - choose from this catalogue. Option available for: PGK, PBK, PZK, USK, KKP (all), ZVP, RZV, PZV, RZV-TGZ, ZVP-TGZ

technical data quick change unit (base frame) incl. fork carriage with hooks				
type	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
SWV 60 + fork carriage	252	126	406	580
SWV 80 + fork carriage	262	131	410	690
SWV 110 + fork carriage	272	134	409	745

- hydraulic locking upon request
- parking devices for attachments upon request
- integral version upon request

constant sideshift upon request (requires one additional hydraulic function)	extra weight kg	extra thickness mm
constant sideshift ISO IV	+110 kg	+23



- multiple quick coupling upon request