
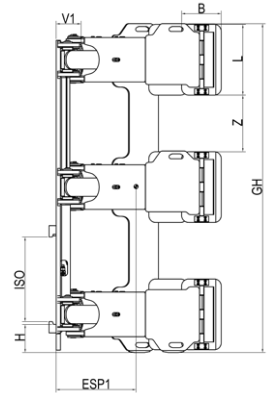




Tower paper roll clamp

TPRK-ND
ISO III/IV/V

The **Durwen tower paper roll clamp type TPRK** is suitable for picking up paper rolls in vertical position. Due to the three clamp arm sets, one, two or three rolls can be picked up safely. The clamp can be equipped with two equally long clamp arms or one long and one short arm.



type	capacity kg LC mm	min. carriage mm	ISO	roll diameter min - max mm	GH mm	contact plates B x L mm	Z mm	H mm	V1 mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
TPRK 45 TB-13-ND	4600/650	900	III/IV	300-1300	2040	250x400	400	80	135	295	upon request	950
TPRK 45 TB-16-ND	4200/800		III/IV	400-1600	2040	250x400		80	135	320		1010
TPRK 60 TB-13-ND	6400/650	950	IV/V	400-1300	2340	280x500		140	175	280		1520
TPRK 60 TB-16-ND	6000/800		IV/V	500-1600	2340	280x500		140	175	300		1650
TPRK 80 TB-13-ND	8000/650	1050	IV/V	500-1300	2340	280x500		140	190	285		1710
TPRK 80 TB-16-ND	7500/800		IV/V	600-1600	2340	280x500		140	190	306		1840

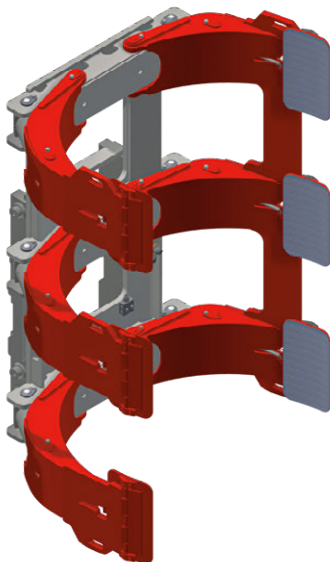

- 1 hydraulic function required
- includes hoses and couplings
- three separate clamp arm sets
- choose equally long clamp arms or one long arm and one short arm
- revolving tower clamps upon request
- hydraulically height-adjustable clamp frame upon request
- contact plates with durable high friction cast grip as standard, optional with coating
- hydraulic pressure of 160 bar required at forklift truck coupling, less pressure results in less clamping force