
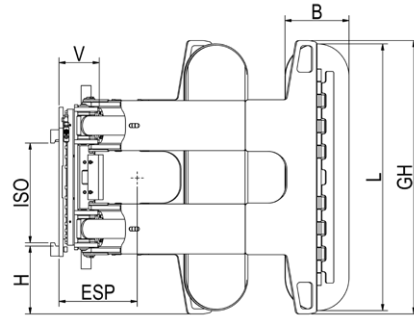


Tissue roll clamp TRK 180°

TRK
40-110-180

The **Durwen tissue roll clamps TRK 180°** are designed with ideal geometry for handling tissue rolls. The large rubber-faced contact plates are carefully designed for good friction coefficient and for minimised impact on tissue at the same time. The 180° rotation is based on the Durwen rack and pinion drive. Due to the technically designed stop at 0° and 180° the roll always stands up straight so that edge damage is prevented when setting down the rolls.

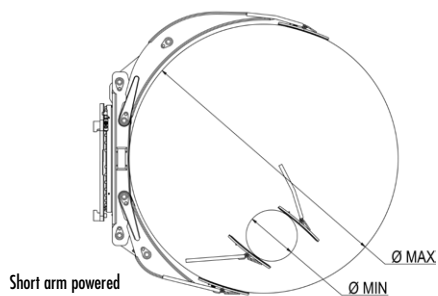

type	capacity kg LC mm	min. carriage mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	H mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
TRK 40 B - 16 - 180	2500/800	950	III/IV	400 - 1600	powered	1240	280x1200	275/280	215	400	335	1005
TRK 40 B - 18 - 180	2150/915			500 - 1830						416		1045
TRK 40 B - 20 - 180	2000/1025			500 - 2050						433		1065
TRK 40 B - 21 - 180	1800/1075			550 - 2150						451		1080
TRK 50 B - 16 - 180	3000/800	1000	III/IV	500 - 1600		1640	400x1600	475/480	220	420	408	1305
TRK 50 B - 18 - 180	2800/915			500 - 1830						436		1340
TRK 50 B - 20 - 180	2500/1025			600 - 2050						454		1365
TRK 50 B - 21 - 180	2400/1075			600 - 2150						471		1390
TRK 60 B - 18 - 180	3200/915	1000	IV	500 - 1830		1640	400x1600	480	238	438	409	1580
TRK 60 B - 20 - 180	2900/1025			600 - 2050						455		1620
TRK 60 B - 21 - 180	2750/1075			600 - 2150						451		1660
TRK 60 B - 22 - 180	2650/1125			600 - 2250						484		1725
TRK 60 B - 25 - 180	2200/1250	1000	IV	600 - 2500		1640	400x1600	480	238	515	410	1780
TRK 80 B - 20 - 180	3100/1025			600 - 2050						457		1830
TRK 80 B - 21 - 180	2950/1075			600 - 2150						473		1865
TRK 80 B - 22 - 180	2950/1125			600 - 2250						496		1905
TRK 80 B - 25 - 180	2600/1250			600 - 2500						514		1995
TRK 100 B - 21 - 180	3350/1075	1100	IV	800 - 2150		1840	400x1800	550	258	478	488	2000
TRK 100 B - 23 - 180	3250/1175			800 - 2350						495		2040
TRK 100 B - 25 - 180	2950/1275			800 - 2550						512		2090
TRK 100 B - 26 - 180	2850/1325			800 - 2650						530		2140
TRK 110 B - 25 - 180	3800/1250	1100	IV	800 - 2500		1440	700x1400	222	258	500	491	2150

- 2 hydraulic functions required
- includes hoses and couplings
- safety valve as standard
- contact plates with rubber-coating (smooth or rhombic) as standard, optional with PU-coating
- contact plates convex angled outward upon request

- for picking up horizontal rolls min. 5° mast forward tilt required
- powered short arm sequential movement as standard
- hydraulic pressure of 160 bar required at forklift truck coupling, less pressure results in less clamping force
- load extender upon request