



Tissue roll clamp TRK 360°

TRK 60-110
ISO IV

The **Durwen tissue roll clamps TRK 360°** are designed with ideal geometry for handling tissue rolls. The large rubber-faced contact plates are carefully designed for good friction coefficient and for minimised impact on tissue at the same time. The 360° rotation is based on the Durwen rotator with drive via worm wheel-worm gear.

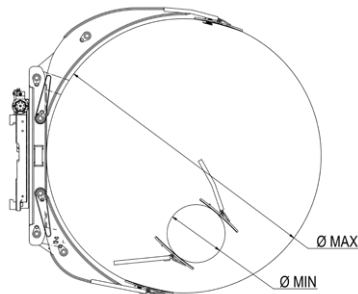

Short arm powered

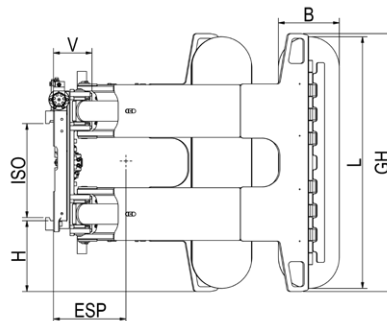

type	capacity kg LC mm	min. carriage mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	H mm	V LLC mm	COG/ ESP hor. mm	COG/ ESP vert. mm	weight kg
TRK 60 B - 18	3200/915	1150	IV	500 - 1830	powered	1640	400x1600	475/480	240	430	380	1650
TRK 60 B - 20	2900/1025			600 - 2050						440		1720
TRK 60 B - 21	2750/1075			600 - 2150						445		1750
TRK 60 B - 22	2650/1125			600 - 2250						450		1790
TRK 60 B - 25	2200/1250			600 - 2500						458		2005
TRK 80 B - 20	3200/1025			600 - 2050		1640	400x1600	475/480	240	441	380	1895
TRK 80 B - 21	3050/1075			600 - 2150						462		1925
TRK 80 B - 22	3050/1125			600 - 2250						485		1950
TRK 80 B - 25	2600/1250			600 - 2500						503		2180
TRK 100 B - 21	3350/1075			800 - 2150		1840	400x1800	550	258	478	382	1995
TRK 100 B - 23	3250/1175			800 - 2350						490		2065
TRK 100 B - 25	2950/1275			800 - 2550						505		2170
TRK 100 B - 26	2850/1325			800 - 2650						510		2230
TRK 110 B - 26	3800/1300			850 - 2600			550x1800			523		2370

- 2 hydraulic functions required
- includes hoses and couplings
- safety valve as standard
- contact plates with rubber-coating (smooth or rhombic) as standard, optional with PU-coating
- contact plates convex angled outward upon request

- for picking up horizontal rolls min. 5° mast forward tilt required
- powered short arm sequential movement as standard, positioning at 45°, choose on order (no add-on price)
- hydraulic pressure of 160 bar required at forklift truck coupling, less pressure results in less clamping force
- load extender upon request

