


Drum clamp


UFK/DFK

The profile-guided drum clamp type **UFK** and **DFK** are designed for handling of drums without pallets. Type DFK features 360° rotation and enables sideways emptying of drums. The arms are rubber-coated as standard.

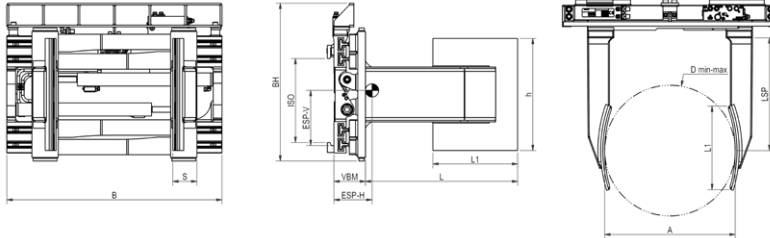


Drum clamp with integral sideshift

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	for drum diameter A mm	height H mm	length L mm	S mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
UFK 15	1,5-2,0/500	860	1500/500	II	980	550-650	510	680	110	144	165	251	335	209

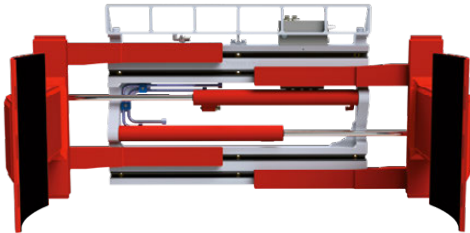


- 2 hydraulic functions required
- includes hoses and couplings
- with pressure relief valve on the clamp function as standard
- cylinder protection upon request
- constant sideshift +/- 100 mm upon request

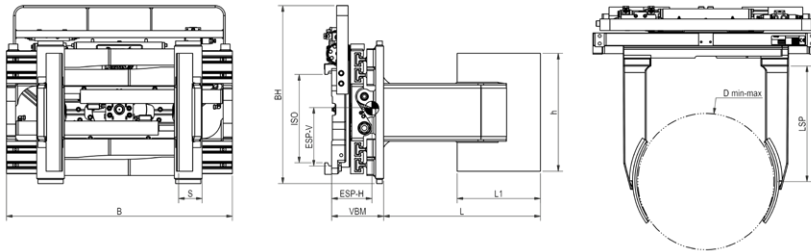

Revolving drum clamp without sideshift

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	for drum diameter A mm	height H mm	length L mm	S mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
DFK 15	1,5-2,0/500	840	1500/500	II	980	550-650	510	680	110	225	174	253	500

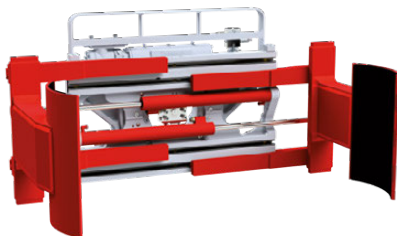

- 2 hydraulic functions required
- includes hoses and couplings
- with pressure relief valve on the clamp function as standard
- 360° revolving as standard
- direct drive due to worm gear
- cylinder protection upon request
- constant sideshift see page 248