


# Foam clamp

integral sideshift



The **foam clamp USK** is ideal for foam block handling. The tubular arm construction allows for safe and careful handling. The arms are bolted to the double T profile carriers.

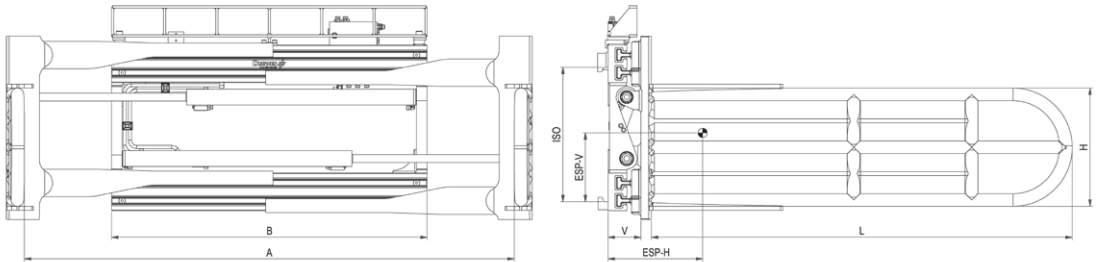

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A ITI mm	height H mm	length L mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
USK 20	1,0-2,0/500	890	800/1000	II	1050	600-1900	450	1600	106	330	250	430	310
		890			1050	600-1900		1800		380	260	440	320
		990			1150	750-2250		1600		320	252	445	315
		990			1150	750-2250		1800		370	262	465	325
		990			1350	850-2480		1600		310	254	480	330
		990			1350	850-2480		1800		360	264	500	340
		990			1550	600-2400		1600		300	256	515	355
		990			1550	600-2400		1800		350	266	530	360
		1050			1650	600-2500		1600		290	258	535	375
		1050			1650	600-2500		1800		340	268	550	380

- 2 hydraulic functions required
- includes hoses and couplings
- with protection strip as standard
- load backrest type LS-K see page 247
- bolt-on arms as standard
- pressure relief valve on clamping as standard
- different arm length upon request
- constant sideshift upon request

