


Sideshifting fork positioner

ZVP-AS
ISO II/III

constant sideshift, ISO 2328 adaptors

The **sideshifting fork positioner ZVP-AS** allows the use of standard forklift truck forks and is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with constant sideshift and bolt-on ISO adaptors for standard hook-on forks.

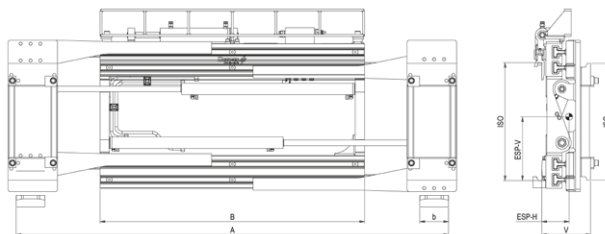

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A OT0 mm	sideshift mm	b for forks mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
ZVP 15-AS	1,0-1,5/500	730 900	1500/500	II	980 1050	560-1710 560-1780	+/- 100	80-140	171	80 77	258 256	262 270
ZVP 20-AS	1,6-2,0/500	730 900 900	2000/500	II	980 1050 1150	560-1710 560-1780 560-1880	+/- 100	80-150	176	81 78 68	252 250 248	270 278 288
ZVP 25-AS	2,0-2,5/600	730 900 900 900 900 980	2500/600	II	980 1050 1080 1150 1150 1200 1400	560-1710 560-1780 560-1810 560-1880 400-1560 560-1930 560-2130	+/- 100	80-150	201	87 86 86 85 83 82 82	253 254 254 253 255 256 257	330 340 345 360 365 368 392
ZVP 30-AS	3,0/500	730 730 900 900 900 900 980 1020	3000/500	III	980 1000 1050 1150 1150 1200 1300 1350 1450	560-1710 560-1730 560-1780 560-1880 420-1600 560-1930 560-2030 560-2080 560-2180	+/- 100	100-150	211	91 91 90 88 88 88 87 87 85	307 304 306 305 307 305 304 304	350 356 365 385 370 392 402 420 450
ZVP 35-AS	3,0/600- 3,5/500	980 980 980	3500/500	III	1150 1250 1350	560-1880 560-1980 560-2080	+/- 100	100-150	217	91 90 88	308 307 306	395 407 415
ZVP 40-AS	3,5-4,0/600	1050 1050 1050 1150	4000/500	III	1150 1250 1350 1450	550-1860 550-1960 550-2060 550-2160	+/- 100	100-150	224	91 89 88 87	327 326 325 324	485 510 535 560
ZVP 45-AS	4,5-5,0/500	1050 1050 1150 1150	5000/500	III	1250 1350 1450 1550	550-1960 550-2060 550-2160 550-2260	+/- 100	100-150	234	94 93 92 91	328 327 326 325	545 565 580 595
ZVP 48-AS	5,0/600	1050 1150 1150	5000/600	III	1350 1450 1550	550-2060 550-2160 550-2260	+/- 100 +/- 100 +/- 160	100-160	249	101 100 105	324 323 322	610 625 640

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- with protection strip as standard
- load backrest type LS-K see page 247

- forks not included, use hook-on forks ISO 2328
- flow divider as standard