


Sideshifting fork positioner

ZVP-AS
ISO IV

constant sideshift, ISO 2328 adaptors


The **sideshifting fork positioner ZVP-AS** allows the use of standard forklift truck forks and is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with constant sideshift and bolt-on ISO adaptors for standard hook-on forks.

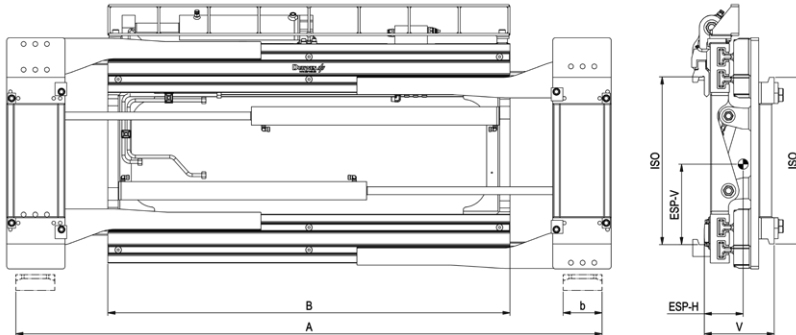

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A 0T0 mm	sideshift mm	b for forks mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
ZVP 50 AS	5,0/600	1090	5000/600	IV	1350	550-2060	+/- 100	100-160	270	102	394	730
		1090			1450	550-2160	+/- 100			101	392	745
		1090			1550	550-2260	+/- 160			98	390	755
		1150			1800	550-2510	+/- 160			95	388	810
ZVP 60 AS	6,0/600	1090	6000/600	IV	1550	550-2260	+/- 160	130-200	270	99	391	760
		1350			1750	550-2460				98	381	795
ZVP 80 AS	7,0-8,0/600	1750	8000/600	IV	1750	560-2460	+/- 160	150-200	290	155	468	1235
		1800			1850	560-2560				154	458	1275

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- with protection strip as standard

- load backrest type LS-K see page 247
- flow divider as standard
- forks not included, use hook-on forks ISO 2328

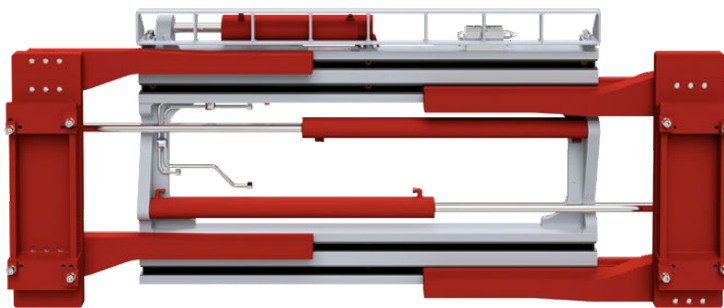

for hook-on forks according to ISO 2328