


Sideshifting fork positioner

ZVP-A

integral sideshift, ISO adaptors

The **sideshifting fork positioner ZVP-A** allows the use of standard forklift truck forks and is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with integral sideshift and bolt-on ISO adaptors for standard hook-on forks. Fully open or closed no sideshift.

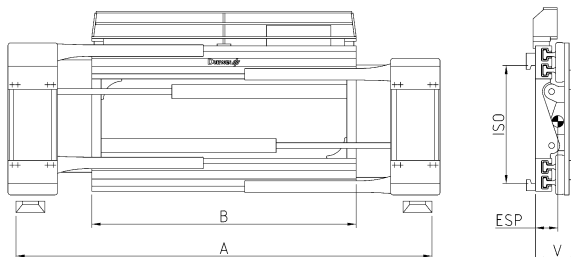

type	lift truck to LC mm	min. carriage mm	capacity kg/mm LC	ISO	B mm	A OTO mm	b for forks mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
ZVP 15-A	1,0-1,5/500	860 990	1500/500	II	980 1050	560-1710 560-1780	80-140	156	82 79	260 258	252 260	129 130
ZVP 20-A	1,0-2,0/500	860 990 990	2000/500	II	980 1050 1150	560-1710 560-1780 560-1880	80-140	161	81 80 79	259 257 255	260 268 278	139 140 140
ZVP 25-A	2,0-2,5/600	860	2500/600	II	980	560-1710	80-150	184	75	254	315	167
		860			1050	560-1780			74	252	325	171
		970			1080	560-1810			74	251	340	171
		990			1150	560-1880			73	250	345	176
		990			1150	420-1600			72	249	350	176
		970			1200	560-1930			72	248	365	177
		980			1400	560-2130			70	247	380	178
ZVP 30-A	3,0/500	860	3000/500	III	980	560-1710	80-150	194	78	305	335	183
		930			1000	560-1730			77	306	340	183
		890			1050	560-1780			76	307	350	187
		990			1150	560-1880			75	308	370	193
		990			1150	420-1600			74	309	355	177
		1040			1200	560-1930			74	310	375	193
		990			1300	560-2030			73	311	395	193
		1150			1350	560-2080			73	312	405	194
		1150			1450	560-2180			71	313	425	194
		990			1150	560-1880			77	305	380	202
ZVP 35-A	3,0/600- 3,5/500	1070 1150	3500/500	III	1250 1350	560-1980 560-2080	100-150	200	76 75	304 304	392 405	202 203
ZVP 40-A	3,5/600- 4,0/500	990	4000/500	III	1150	550-1860	100-150	207	78	322	465	251
		1090			1250	550-1960			77	321	490	251
		1150			1350	550-2060			76	320	510	266
		1150			1450	550-2160			75	318	536	267
ZVP 45-A	4,0/600- 5,0/500	1090	5000/500	III	1250	550-1960	100-150	217	81	321	525	276
		1150			1350	550-2060			80	320	540	292
		1150			1450	550-2160			79	319	555	293
		1350			1550	550-2260			78	318	570	293
ZVP 48-A	5,0/600	1150	5000/600	III	1350 1450	550-2060 550-2160	100-150	232	88 87	320 318	575 610	337 339

- 2 hydraulic functions required
- includes hoses and couplings
- load backrest type LS-K see page 247
- protection strip as standard
- if no sideshift required indicate on your order

- no clamping allowed
- forks not included, use hook-on forks ISO 2328