


Sideshifting fork positioner

ZVP-A

integral sideshift, ISO adaptors

The **sideshifting fork positioner ZVP-A** allows the use of standard forklift truck forks and is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with integral sideshift and bolt-on ISO adaptors for standard hook-on forks. Fully open or closed no sideshift.

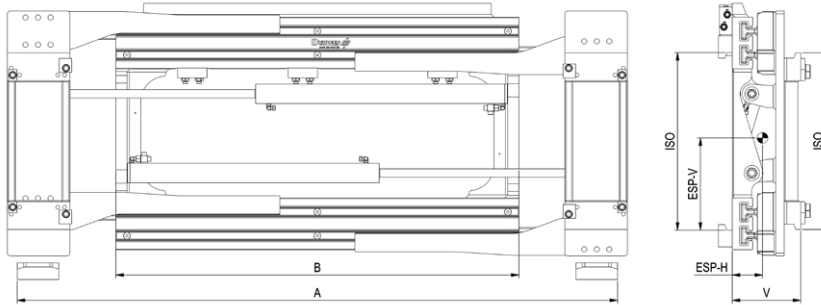

type	lift truck to LC mm	min. carriage mm	capacity kg/mm LC	ISO	B mm	A OTO mm	b for forks mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
ZVP 50-A	5,0/600	1255	5000/600	IV	1350	550-2060	100-160	249	87	379	680	377
		1320			1450	550-2160			84	377	695	378
		1420			1550	550-2260			83	376	705	379
		1640			1800	550-2510			80	378	770	380
ZVP 60 A	6,0/600	1420	6000/600	IV	1550	550-2260	130-120	249	79	375	707	380
		1640			1750	550-2460			78	374	755	386
ZVP 80 A	7,0-8,0/600	1640	8000/600	IV	1750	560-2460	150-200	269	125	450	1170	590
		1640			1850	560-2560			120	445	1210	600

- 2 hydraulic functions required
- includes hoses and couplings
- load backrest type LS-K see page 247
- if no sideshift required indicate on your order
- no clamping allowed
- forks not included, use hook-on forks ISO 2328

