


Sideshifting fork positioner

ZVP
ISO II/III

integral sideshift, bolt-on forks

The **sideshifting fork positioner ZVP** is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. A huge variety of loads can be handled with extreme efficiency. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with integral sideshift and bolt-on forks as standard. Clamping of goods is not allowed with this attachment.

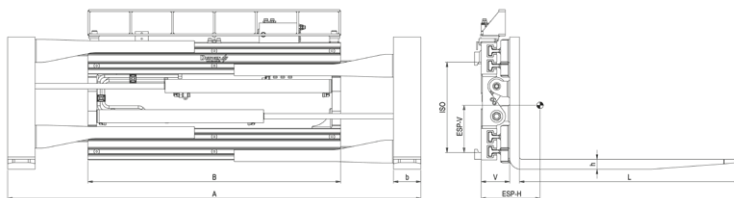

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A OTD mm	forks b x h x L mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
ZVP 15*	1,0-1,5/500	720 860 890	1500/500	II	880 980 1050	560-1610 560-1710 560-1780	100x35x1200	101	185 180 177	208 203 201	285 295 300	120 130 140
ZVP 20	1,6-2,0/500	860 890 990	2000/500	II	980 1050 1150	560-1710 560-1780 560-1880	100x40x1200	106	190 188 187	198 195 192	315 325 335	145 155 165
ZVP 25	2,0-2,5/600	860 890 890 970 990 990 970 980	2500/600	II	980 1050 1050 1080 1150 1150 1200 1400	560-1710 560-1780 360-1380 560-1810 560-1880 420-1600 320-1400 560-1930 560-2130	125x45x1200	131	238 233 233 225 230 228 227 220 215	185 183 179 187 186 184 182 181 180	390 415 395 427 430 425 400 424 456	245 254 245 254 260 250 230 265 270
ZVP 30	3,0/500	860 860 890 990 990 1040 990 1150 1150	3000/500	III	980 1000 1050 1150 1150 1200 1300 1350 1450	560-1710 560-1730 560-1780 560-1880 420-1600 560-1930 560-2030 560-2080 560-2180	125x45x1200	131	238 237 236 233 212 206 202 200 194	226 227 229 232 230 233 234 235 238	420 428 435 450 439 461 452 475 490	239 240 263 268 253 268 269 270 272
ZVP 35	3,0/600- 3,5/500	990 1070 1150	3500/500	III	1150 1250 1350	560-1880 560-1980 560-2080	140x50x1200	136	238 235 233	222 224 226	495 513 525	314 315 316
ZVP 40	3,5-4,0/600	990 1090 1150 1150	4000/500	III	1150 1250 1350 1450	550-1860 550-1960 550-2060 550-2160	140x50x1200	138	206 205 197 196	251 252 254 255	590 605 620 635	367 368 369 370
ZVP 45	4,5-5,0/500	990 1090 1150 1150 1350	5000/500	III	1150 1250 1350 1450 1550	550-1860 550-1960 550-2060 550-2160 550-2260	150x60x1200	148	235 231 224 220 216	242 243 245 246 248	660 680 705 720 735	433 441 450 450 452
ZVP 48	5,0/600	1150 1350	5000/600	III	1350 1450	550-2060 550-2160	150x60x1200	158	224 220	247 249	735 755	482 490

- 2 hydraulic functions required
- includes hoses and couplings
- with protection strip as standard
- load backrest type LS-K see page 247
- flow divider as standard

*Forks longer 1600 mm
cross section changes

type	forks b x h mm
ZVP 15	100x40