


Sideshifting fork positioner

**ZVP
ISO IV**

integral sideshift, bolt-on forks

The **sideshifting fork positioner ZVP** is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. A huge variety of loads can be handled with extreme efficiency. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with integral sideshift and bolt-on forks as standard. Clamping of goods is not allowed with this attachment.

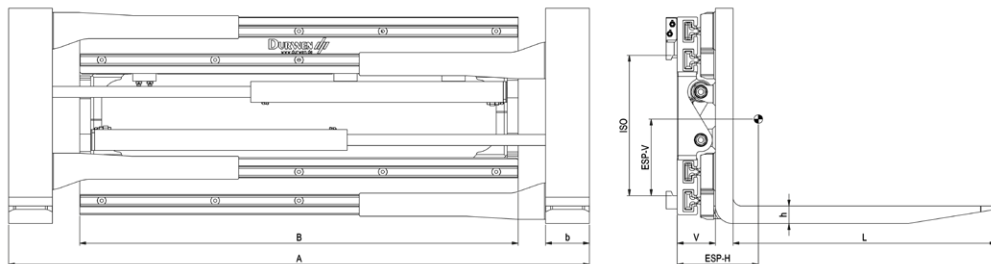

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A OTD mm	forks b x h x L mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
ZVP 50	5,0/600	1255	5000/600	IV	1350	550-2060	150x60x1200	158	208	350	780	505
		1320			1450	550-2160			207	352	795	510
		1420			1550	550-2260			206	355	810	515
		1640			1800	550-2510			190	360	860	520
		1640			1800	550-2510			190	360	860	520
ZVP 60	6,0/600	1255	6000/600	IV	1300	550-2010	150x65x1200	158	230	350	790	526
		1320			1450	550-2160			225	345	815	533
		1420			1550	550-2260			220	340	830	535
		1600			1750	550-2460			215	330	880	537
		1640			1800	550-2510			198	295	895	545
		1640			2000	550-2710			193	297	930	550
		1640			2000	550-2710			193	297	930	550
ZVP 80	7,0-8,0/600	1600	8000/600	IV	1750	560-2460	200x70x1200	159	230	380	1190	610
		1600			1800	560-2510			227	375	1210	612
		1600			1850	560-2560			225	370	1220	614
		1600			1950	560-2660			220	360	1250	630
		1600			2000	560-2710			210	355	1260	640
		1600			2200	560-2910			197	350	1330	660
		1600			2200	560-2910			197	350	1330	660
ZVP 100	8,0/900	1600	8000/900	IV	1950	560-2600	200x80x1200	175	225	389	1490	800
		1600			2000	560-2650			222	385	1493	805
		1600			2100	560-2750			220	381	1520	815
		1600			2200	560-2850			215	371	1560	825
		1600			2400	560-3050			209	360	1594	850
		1600			2400	560-3050			209	360	1594	850
ZVP 110	8,0/1100	1600	8000/1100	IV	2200	560-2750	200x80x1200	195	230	369	1990	830
		1600			2400	560-2950			225	349	2120	850

- 2 hydraulic functions required
- includes hoses and couplings

- load backrest type LS-K see page 247
- flow divider as standard

